



REPORT

Dialight, 1501 Route 34 South, Farmingdale, NJ 07727

Project No. G101454628

Date: December 12, 2013

INTERTEK REPORT NO. 101464628CRT-001
DIALIGHT REPORT NO. L13025

TEST OF ONE LSA ATEX LINEAR

MODEL NO. LSA3C4D2F
DRIVER MODEL NO. INTEGRATED DIALIGHT DRIVER
LED MODEL NO. CREE XTE

RENDERED TO

DIALIGHT COPORATION
1501 ROUTE 34 SOUTH
FARMINDALE, NJ 07727

TEST: Electrical and Photometric tests as required to the IESNA test standard.

STATEMENT OF LIMITATION: This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

AUTHORIZATION: The testing performed was authorized by signed quote number 500501452.

STANDARDS USED: The following American National Standards or Illuminating Engineering Society of North America Test Guides were used in part or totally to test each specimen:

IESNA LM-79 - 2008: Electrical and Photometric Measurements of Solid State Lighting

ANSI NEMA ANSLG C78.377: 2012: Specifications of the Chromaticity of Solid State Lighting Products

Energy Star Version 1.2 (2012): Program Requirements for Luminaires (Light Fixtures)

Energy Star Manufacturer's Guide Version 2.1 (2010): Guide for Qualifying Solid State Lighting Luminaires

DESCRIPTION OF SAMPLE: The client submitted one production sample of model number L13025. The sample was received by Dialight lab on December 10, 2013, in undamaged condition and one sample was tested as received. The sample designation was L13025.

DATES OF TESTS: December 10, 2013 through December 12, 2013.

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to copy or distribute this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.



SUMMARY

Model No.: L13025
Description: LSA ATEX LINEAR

Criteria	Result	
	Sphere	Goniometer
Total Lumen Output (Lumens)	2741	2810
Total Power (W)	35.72	35.64
Luminaire Efficacy (LPW)	76.74	78.84

Criteria	Result
Power Factor at 120Vac	0.990
Power Factor at 277Vac	0.937
Current ATHD % at 120Vac	11.48
Current ATHD % at 277Vac	11.40
Correlated Color Temperature (CCT - K)	5533
Color Rendering Index (CRI - Ra)	72.2
Color Rendering Index (CRI - R9)	-11.1
DUV	0.004
Chromaticity Coordinate (x)	0.332
Chromaticity Coordinate (y)	0.334
Chromaticity Coordinate (u')	0.209
Chromaticity Coordinate (v')	0.316
Maximum In-Situ Source Temperature Point (°C)	38.9

EQUIPMENT LIST

Equipment Used	Model Number	Control Number	Last Date Calibrated	Calibration Due Date
Elgar AC Power Supply	CW1251P	OP-014	VBV	VBV
Instrument System Spectrometer	CAS140B-151	OB-006	VBV	VBV
Sorensen DC Power Supply	XHR150-7	OP-016	VBV	VBV
Delta Elektronika DC Power Supply	SM300-5	OP-013	VBV	VBV
Volttech Universal Breakout Box	PM1000+	OP-012	03/06/13	03/06/14
Instrument System Lamps (Osram Sylvan STD-20WF-3		OP-007	10/22/13	10/22/14
Instrument System Sphere	ISP1500	OP-010	VBV	VBV
Digital Thermometer 342	TPI 343	OP-011	03/06/13	03/06/14
Instek AC Power Supply	APS-9501	N/A	VBV	VBV
Volttech Power Analyzer	PM1000+	OP-012	02/27/13	02/27/14
Extech Hygro-Thermometer	445703	OP-017	06/01/13	06/01/14
LSI High Speed Mirror Goniometer	6240T	N/A	VBV	VBV
Elgar AC Power Supply	CW1251P	N/A	VBV	VBV
Yokogawa Power Analyzer	760401	OP-004	03/06/13	03/06/14
Omega TC	Dpi8	OP-001	03/06/13	03/06/14
Extech Hygro-Thermometer	445703	OP-018	04/22/13	04/22/14
Fluke 8808A Digital Multimeter	8808A	OP-002	03/06/13	03/06/14
Extech Hygro-Thermometer	445703	OP-017	06/01/13	06/01/14
Fluke Multimeter	PM2525	M127	11/01/13	11/01/14
Digital Thermometer 342	TPI 343	OP-011	03/06/13	03/06/14
LSI Santdard Lamps	#30279	OP-011	09/10/13	09/10/14



TEST METHODS

Seasoning in Sample Orientation – LED Products

No seasoning was performed in accordance with IESNA LM-79.

Photometric and Electrical Measurements – Integrating Sphere Method

A Instrument System CAS 140B Array Spectroradiometer and 1.5 or Five Foot Sphere was used to measure correlated color temperature, chromaticity coordinates, and the color rendering index for each SSL unit.

Ambient temperature was measured at a position inside the sphere. Each SSL unit was operated on the client provided driver at the rated input voltage in its designated orientation. Each SSL unit was allowed to stabilize for at least thirty minutes before measurements were made. Electrical measurements including voltage, current, and power were measured using the Volttech Power Analyzer.

The calibration of the sphere photometer-spectroradiometer system is traceable to the National Institute of Standards and Technology.

Photometric and Electrical Measurements – Distribution Method

A LSI Type C High Speed Model 6240T Mirror Goniometer was used to measure the intensity (candelas) at each angle of distribution for each sample.

Ambient temperature was measured equal to the height of the sample mounted on the Goniometer equipment. Each sample was operated at input rated voltage in its designated orientation. Each sample was allowed to stabilize for at least thirty minutes before measurements were made. Electrical measurements including voltage, current, and power were measured using the Xitron or Yokogawa Power Analyzer.

Some graphics were created with Photometrics Plus software.

In-Situ Maximum Measured Power Supply Case and LED Source Point Temperature

Power supply case and/or LED source operating temperature measurements were taken on one test sample per model with a thermocouple and Fluke 87 temperature meter. The SSL sample was allowed to reach thermal equilibrium for seven and a half hours before measurements were taken. Power supply or source temperature measurements were measured at the TMPPS or TS point as indicated by the included diagram in accordance with manufacturers declared hot spot location, or at a hot spot location found with a thermal camera when no diagram from the manufacturer is given. The maximum temperature was recorded for the sample. A simulated ceiling or other enclosure may be used in accordance to UL 1598 or UL 153 as applicable.



RESULTS OF TEST

Photometric and Electrical Measurements at Ambient Temperature (25°C +/- 1°C) - Integrating Sphere Method


Intertek Sample No.	Base Orientation	Input Voltage {Vac}	Input Current (mA)	Input Power (Watts)	Input Power Factor	Current ATHD (%)	Luminous Flux (Lumens)	Lumen Efficacy (LPW)
L13025	UP	120.0	0.299	35.72	0.990	11.48	2741	76.74
		277.0	0.143	37.07	0.937	11.40		

Correlated Color Temperature (K)	CRI -Ra	CRI -R9	DUV	CIE 31' Chromaticity Coordinate (x)	CIE 31' Chromaticity Coordinate (y)	CIE 76' Chromaticity Coordinate (u')	CIE 76' Chromaticity Coordinate (v')
5533	72.2	-11.1	0.004	0.332	0.334	0.209	0.316

Spectral Distribution over Visible Wavelengths

nm	W/nm	nm	W/nm	nm	W/nm	nm	W/nm	nm	W/nm
375	0.001	465	0.016	555	0.045	645	0.020	735	0.002
380	0.001	470	0.011	560	0.045	650	0.017	740	0.015
385	0.001	475	0.008	565	0.045	655	0.016	745	0.015
390	0.001	480	0.007	570	0.045	660	0.014	750	0.015
395	0.001	485	0.007	575	0.044	665	0.012	755	0.015
400	0.002	490	0.009	580	0.044	670	0.011	760	0.015
405	0.003	495	0.012	585	0.043	675	0.009	765	0.015
410	0.004	500	0.016	590	0.042	680	0.008	770	0.015
415	0.007	505	0.021	595	0.041	685	0.007	775	0.015
420	0.014	510	0.026	600	0.039	690	0.006	780	0.015
425	0.024	515	0.031	605	0.038	695	0.005		
430	0.038	520	0.036	610	0.036	700	0.005		
435	0.058	525	0.039	615	0.033	705	0.004		
440	0.083	530	0.041	620	0.031	710	0.004		
445	0.089	535	0.043	625	0.029	715	0.003		
450	0.064	540	0.044	630	0.026	720	0.003		
455	0.038	545	0.044	635	0.024	725	0.002		
460	0.025	550	0.045	640	0.022	730	0.002		

Spectral Data Over Visible Wavelengths

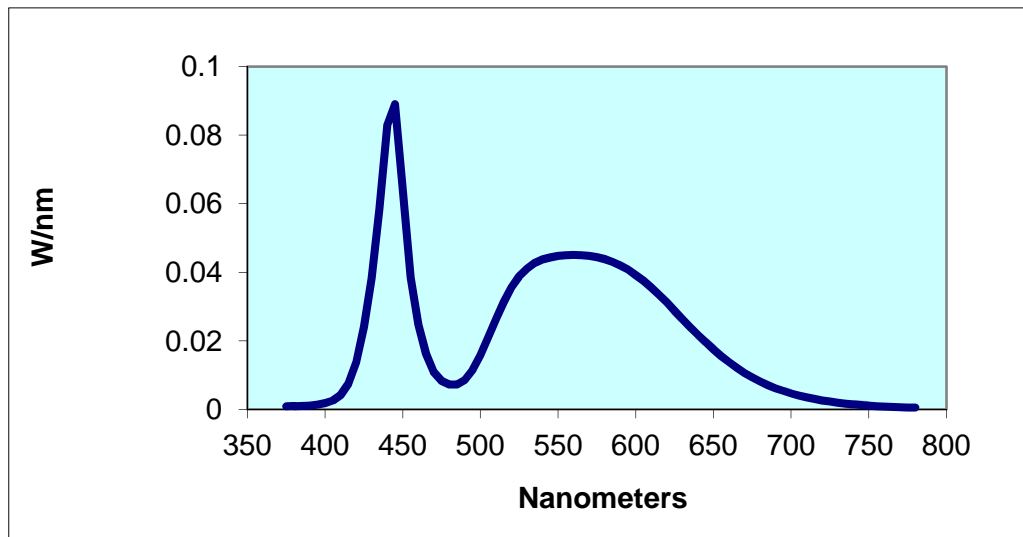




RESULTS OF TEST (cont'd)

Photometric and Electrical Measurements at Ambient Temperature (25°C +/- 1°C) – Distribution Method

Intertek Sample No.	Base Orientation	Input Voltage {Vac}	Input Current (A)	Input Power (Watts)	Input Power Factor	Absolute Luminous Flux (Lumens)	Lumen Efficacy (Lumens Per Watt)
L13025	UP	120.0	0.308	35.64	0.991	2810	78.84


Intensity (Candlepower) Summary at 25°C - Candelas

INTENSITY (CANDLEPOWER) SUMMARY						OUTPUT LUMENS
ANGLE	ALONG	22.5	45	67.5	ACROSS	
0	1144	1144	1144	1144	1144	
5	1134	1141	1144	1141	1137	110
15	1099	1105	1108	1106	1102	312
25	1040	1047	1050	1051	1051	482
35	936	944	947	934	932	584
45	735	749	742	726	725	565
55	493	495	488	481	478	435
65	297	294	273	164	96	235
75	129	126	31	19	18	74
85	17	6	4	4	4	10
90	0	0	0	0	0	
95	0	0	0	0	0	0
105	0	0	0	0	0	0
115	0	0	0	0	0	0
125	0	0	0	0	0	0
135	0	0	0	0	0	0
145	0	0	0	0	0	0
155	0	0	0	0	0	0
165	0	0	0	0	0	0
175	0	0	0	0	0	0
180	0	0	0	0	0	

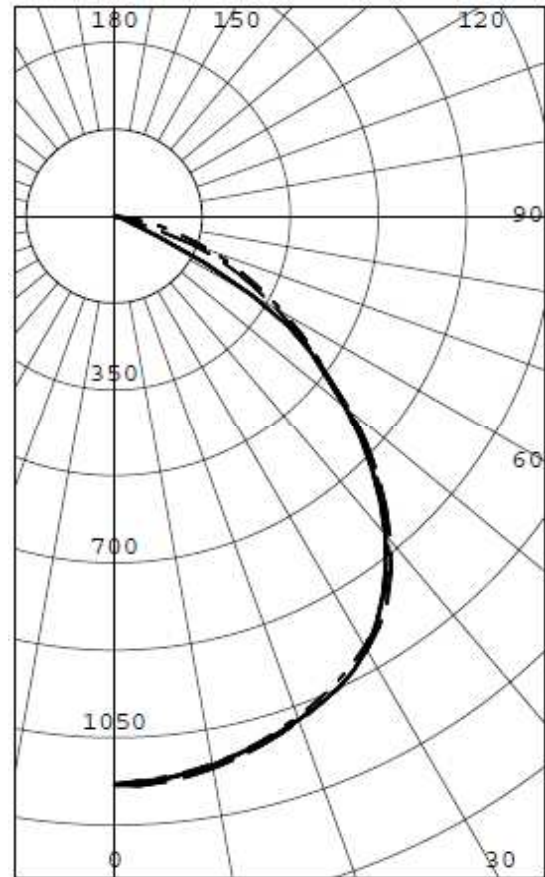

RESULTS OF TEST (cont'd)

Isoillumination Plots

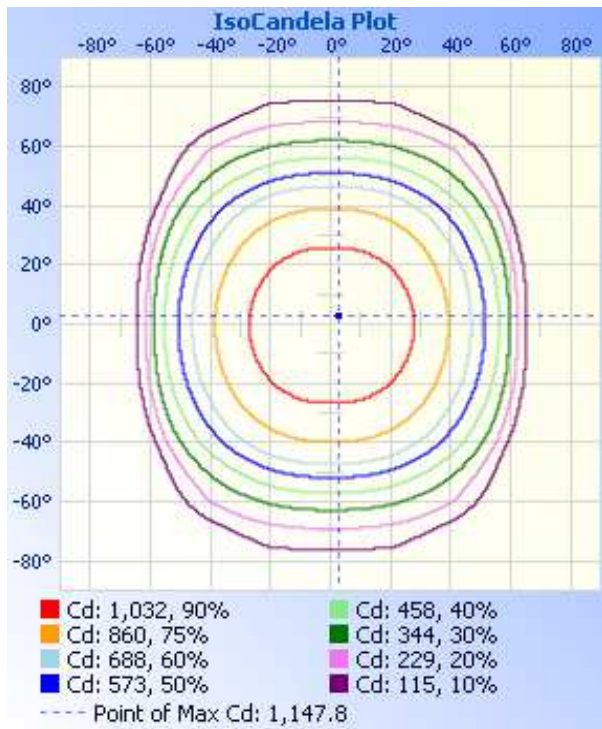

Zonal Lumen Summary and Percentages at 25°C

ZONAL LUMENS AND PERCENTAGES

ZONE	LUMENS	% LUMINAIRE
0-30	904	32.21
0-40	1488	53.03
0-60	2488	88.65
0-90	2807	100.00
40-90	1318	46.97
60-90	318	11.35
90-180	0	0.00
0-180	2807	100.00

RESULTS OF TEST (cont'd)

In-Situ Maximum Measured LED Source Temperature

Manufacturer Supplied Documentation:

LED identified as: Cree XTE



CASE TEMPERATURE (T_c) MEASUREMENT POINT

XLamp XT Family LED case temperature (T_c) should be measured on the PCB surface, as close to the LED's thermal pad as possible. This measurement point is shown in the picture below.



PRODUCT CHARACTERISTICS

Characteristics	Unit	Minimum	Typical	Maximum
Thermal resistance, junction to solder point	°C/W		5	
Viewing angle (FWHM) - white	degrees		115	
Viewing angle (FWHM) - royal blue	degrees		140	
Temperature coefficient of voltage	mV/°C		-2.5	
ESD classification (HBM per MIL-Std-883D)			Class 2	
DC forward current	mA			1500
Reverse voltage	V			5
Forward voltage (@ 350 mA, 85 °C)	V		2.85	3.4
LED junction temperature	°C			150

Maximum Junction Temperature from LED specification (T_j) = 150°C

Thermal Resistance Formula from LED specification = 5°C/W

Maximum Forward Voltage (V_f) from LED specification = 3.4V

Measured LED Current = 350mA

Calculated LED Wattage = V_f x Measured LED Current = 1.19W

Maximum Source Temperature (T_s) = T_j – (LED Wattage x Thermal Resistance) = 144°C

Maximum Measured Manufacturer Designated Source Temperature

Sample No.	Maximum Measured Source Temperature (°C)	Location	Maximum Rated Source Temperature (°C)
L13025	38.9	Per diagram	144

In-Situ Picture – T_s

In-Situ Picture – T_s location



PICTURE (not to scale)


X



CONCLUSION

The results tabulated in this report are representative of the actual test samples submitted for this report only. The data is provided to the client for further evaluation. Compliance to the referenced specification requirements was not determined in this report.

In Charge Of Tests:



Richard Huegi
Dialight Coporation
Senior Optics Technicair
Lighting Division

Report Reviewed By:



Cecil Thomas
Dialight Corporation
Engineering Manager
Lighting Division

Attachment: None

Report Reviewed By:



Jacki Swiernik
Intertek
Staff Engineer
Lighting Division