

# SafeSite® LED Wallpack / Bulkhead

## Technical Specifications



### Ratings and Certifications

- UL 1598/A
- CSA C22.2 No. 250
- IP66/67
- RoHS compliant
- CID2 A,B,C,D
- CID2 F,G
- 5 year warranty
- L70 rated for >150,000 hours

\*All features not available on every model. Please refer to product part number pages for model specifics.

### Temperature Ratings

Ambient Temperature Range T4A Temperature Code

11W / 22W	34W
-40°F to +140°F (-40°C to +60°C)	-40°F to +122°F (-40°C to +50°C)

### Mechanical Information

<b>Fixture weight:</b>	11 lb (5.0 kg)
<b>Shipping weight:</b>	16 lb (7.3 kg)
<b>Cable entry:</b>	All cable entries are drilled and tapped (see ordering options)

### Specifications

<b>Voltage options:</b>	100-277 VAC	<b>Housing:</b>	Copper-free LM6 cast aluminum
<b>Operating temp:</b>		<b>Lens:</b>	High impact resistance clear/frosted glass
11W / 22W	-40°F to +140°F (-40°C to +60°C)	<b>CRI:</b>	75
34W	-40°F to +122°F (-40°C to +50°C)	<b>CCT:</b>	5650K (cool white) 4300K (neutral white)
<b>Power factor:</b>	>0.9	<b>Surge protection:</b>	1kV line-to-line, 2kV line-to-ground
<b>THD:</b>	<20%		


### Comparison

	Warranty	L70	T-Rating
Dialight LED Wallpack/Bulkhead	5yr	>150,000	T6
Metal Halide	1	6,000	T2
High Pressure Sodium	1	20,000	T2A

### Lumens Wattage lm/W Mounting Heights


Lumens	Wattage	lm/W	Mounting Heights
2,250	34	66	20'
2,150	34	63	↕
1,200	22	55	
600	11	55	10'

### Dimensions

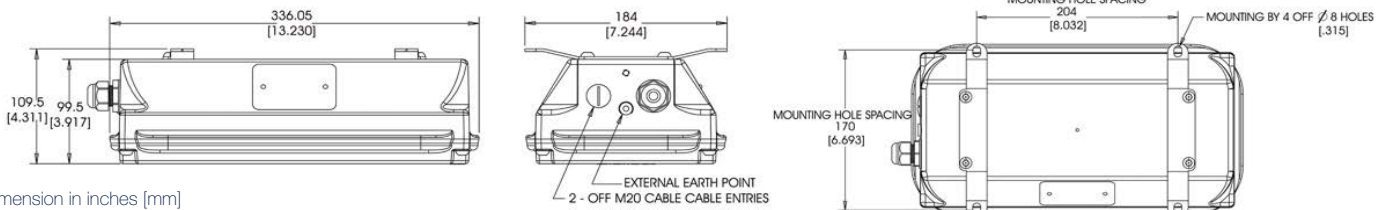

Dimension in inches [mm]

### Beam Distribution

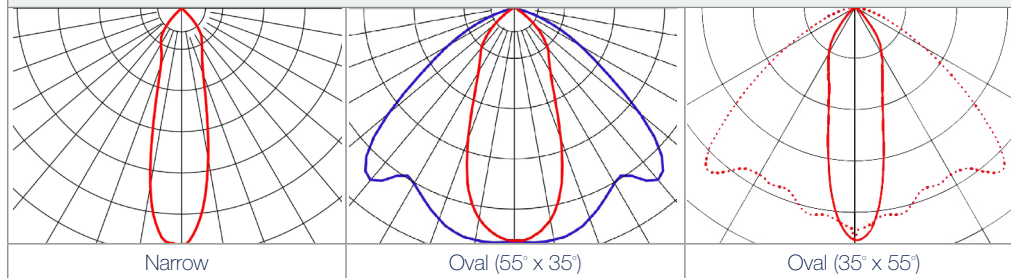

### Entry Options

<b>Standard Option</b> 2 Entries One Side	<b>Option "E"</b> 2 Entries One Side, 1 Entry Opposite Side. Add E to the end of the order code	<b>Option "R"</b> Add R to the end of the order code	<b>Option "H"</b> 2 Entries One Side, 2 Entries Opposite Side and 1 Entry in the Rear Add H to the end of the order code

When ordering please refer our website [www.dialight.com](http://www.dialight.com) to view the current versions of all relevant product documentation, including the most up to date product data sheets. For the avoidance of doubt, in the event of any discrepancy between the contents of this document and information provided on our website, the information provided on our website shall prevail.

# SafeSite® LED Wallpack / Bulkhead


## Ordering Information & Accessories

Classifications: CID2 Groups A, B, C, D • CIID2 F, G

Part Number	Bracket	CID1	CID2	CIID1	CIID2	CIID3	Voltage	Lens	CCT	Fixture Lumens	Watt	lm/W	Beam Distribution
<b>Standard Models - 100-277 VAC</b>													
WPC4C3LALGC	Angle		•		•		100-277 VAC	Clear tempered glass	5650K (cool white)	2,250	34	66	Oval (35° x 55°)
WPC4C3FLGCG	Flush		•		•		100-277 VAC	Clear tempered glass	5650K (cool white)	2,250	34	66	Oval (35° x 55°)
WPC2C3LNLGC	Standard		•		•		100-277 VAC	Clear tempered glass	5650K (cool white)	2,250	34	66	Narrow
WPC5C3LFLGCE	Flush		•		•		100-277 VAC	Clear tempered glass	5650K (cool white)	2,150	34	63	Oval (55° x 35°)
WPC5C3FLGCG	Flush		•		•		100-277 VAC	Clear tempered glass	5650K (cool white)	2,150	34	63	Oval (55° x 35°)
WPC5C3LNLGC	Standard		•		•		100-277 VAC	Clear tempered glass	5650K (cool white)	2,150	34	63	Oval (55° x 35°)
WPC5C3HALGF	Angle		•		•		100-277 VAC	Frosted tempered glass	5650K (cool white)	1,200	22	55	Oval (55° x 35°)
WPC2C3HALGCG	Angle		•		•		100-277 VAC	Clear tempered glass	5650K (cool white)	1,200	22	55	Narrow
WPC2C3HALGF	Angle		•		•		100-277 VAC	Frosted tempered glass	5650K (cool white)	1,200	22	55	Narrow
WPC2C3HFLGCG	Flush		•		•		100-277 VAC	Clear tempered glass	5650K (cool white)	1,200	22	55	Narrow
WPC2C3HFLGF	Flush		•		•		100-277 VAC	Frosted tempered glass	5650K (cool white)	1,200	22	55	Narrow
WPC4C3HALGCG	Angle		•		•		100-277 VAC	Clear tempered glass	5650K (cool white)	1,200	22	55	Oval (35° x 55°)
WPC4C3HALGF	Angle		•		•		100-277 VAC	Frosted tempered glass	5650K (cool white)	1,200	22	55	Oval (35° x 55°)
WPC4C3HFLGCG	Flush		•		•		100-277 VAC	Clear tempered glass	5650K (cool white)	1,200	22	55	Oval (35° x 55°)
WPC5C3HNLGF	Standard		•		•		100-277 VAC	Frosted tempered glass	5650K (cool white)	1,200	22	55	Oval (35° x 55°)
WPC2C3HNLGCG	Standard		•		•		100-277 VAC	Clear tempered glass	5650K (cool white)	1,200	22	55	Narrow
WPC4C3HNLGCG	Standard		•		•		100-277 VAC	Clear tempered glass	5650K (cool white)	1,200	22	55	Oval (35° x 55°)
WPC2C3CALGCG	Angle		•		•		100-277 VAC	Clear tempered glass	5650K (cool white)	600	11	55	Narrow
WPC4C3CALGCG	Angle		•		•		100-277 VAC	Clear tempered glass	5650K (cool white)	600	11	55	Oval (35° x 55°)
WPC4C3CALGF	Angle		•		•		100-277 VAC	Frosted tempered glass	5650K (cool white)	600	11	55	Oval (35° x 55°)
WPC2C3CNLGC	Standard		•		•		100-277 VAC	Clear tempered glass	5650K (cool white)	600	11	55	Narrow

All values typical unless otherwise stated (tolerance +/- 10%).

Part numbers listed in the table above come with (2) M20 entries on one side. For through wiring models, add an **E** to the end of the part number. For rear entry option, add an **R** to the end of the part number. For 3/4" NPT-threaded entries, add a **5** to the end of the part number.



**WP-BRKT-SSAD-J**

- Adjustable bracket

**WP-BRKT-LG-PF**

- Pipe and flush bracket



**WP-STMB-LG00- 22**

- 1 1/2" BSP-threaded straight stanchion mounting bracket

**WP-STMB-LG00 -24**

- 1 1/2" NPT-threaded straight stanchion mounting bracket



**WP-STMB-LG85-22**

- 1 1/2" BSP-threaded 85° stanchion mounting bracket

**WP-STMB-LG85-24**

- 1 1/2" NPT-threaded 85° stanchion mounting bracket



**WP-STMB-LG25-22**

- 1 1/2" BSP-threaded 25° stanchion mounting bracket

**WP-STMB-LG25-24**

- 1 1/2" NPT-threaded 25° stanchion mounting bracket

When ordering please refer our website [www.dialight.com](http://www.dialight.com) to view the current versions of all relevant product documentation, including the most up to date product data sheets. For the avoidance of doubt, in the event of any discrepancy between the contents of this document and information provided on our website, the information provided on our website shall prevail.