

.....Dialight



SafeSite® LED High Bay
High Efficiency - ATEX / IECEx, INMETRO
for Outdoor Industrial Applications





Features & Benefits

- 10 year warranty
- L70 rated for >150,000 hours @ 25°C ambient
- Low power consumption
- Instant on/off
- Low Maintenance
- Mercury free
- No UV or IR
- Resistant to shock and vibration
- Superior colour rendition index compared to HPS, LPS, MV
- Optional glass retention film available

Application



The Dialight SafeSite® LED High Bay luminaire was designed specifically to replace conventional lighting in a wide variety of indoor & outdoor hazardous area applications. Its low profile light weight design and versatile mounting options make it ideal for High Bay applications for ATEX and IECEx classified hazardous area zones. Dialight's long life LED luminaires are designed to meet the most demanding specification criteria while offering maximum energy savings, reduced maintenance costs, and a superior quality of light.

SafeSite® LED High Bay - ATEX / IECEx

Standard Models



Patent pending

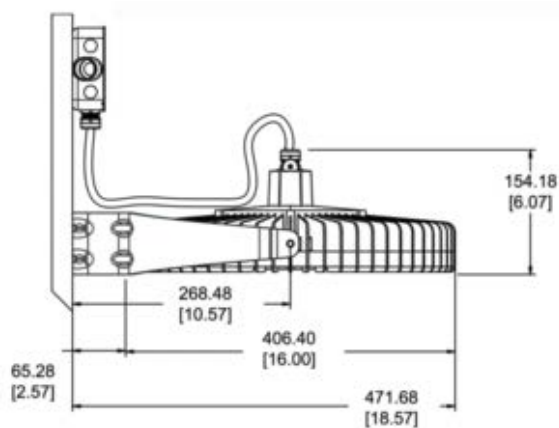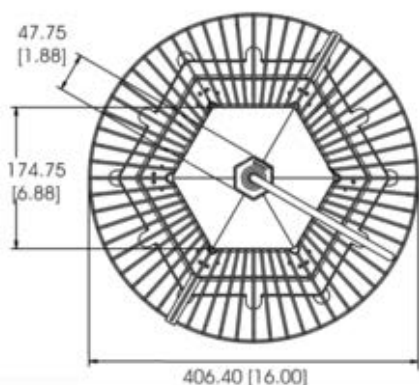

Dimensions in mm (inches)

Certifications & Ratings

- ATEX / IECEx Zones 1, 21
- ATEX / IECEx Zones 2, 22
- CE
- ABS Design Assessed: (pending)
- IP66
- RoHS compliant

Certifications & Ratings

- Ex II 2 GD Ex d* IIB+H2 T5 Gb
- Ex tb IIIC 100°C
- Ex II 2 GD Ex d* IIB+H2 T4 Gb
- Ex tb IIIC 135°C
- Certificate numbers: Baseefa 12ATEX0070X IECEx BAS 12.0044X

*Add EX e for factory fitted junction box

Mechanical Information:

- Fixture weight:** 14.6 kg (31 lbs) with fixed cable
16.1 kg (34 lbs) with junction box
- Mounting:** 316 stainless steel stirrup mounting bracket included
- Wiring options:** Factory installed 3 meter SWB cable or factory fitted junction terminal box with 2 off M20 x 1.5mm or 2 off M25 x 1.5mm cable entries

Electrical Specifications:

- Operating voltage:** 110–277 VAC, 50/60Hz: 23,500lm models
100–277 VAC, 50/60Hz: 16,000lm and lower models
- Total system power consumption:** See table
- Operating temperature:** -40°C to +60°C
- Harmonics:** IEC 61000-3-2
- Surge protection:** Protection devices capable of handling up to 6kV. Tested for 6kV/2 ohm combination wave, as per IEEE C62.41, line-line and line-ground
- THD:** <20%
- Power factor:** > 0.9

Construction:

- Housing:** Copper free aluminum
- Finish:** Superior dual coat finish
- Sealed polyester topcoat
- Chemical resistant epoxy primer
- Lens:** Tempered glass
(optional fragment retention film available)

Photometric Information:

- CRI:** 75
- CCT:** 5000K (cool white)
4000K (neutral white)

All values typical unless otherwise stated (tolerance +/- 10%)

WARNING - INSTALLATION & SECONDARY RETENTION. Use of any Dialight products without proper installation (including secondary retention / netting) and periodic inspections could cause severe injury or death. Dialight recommends that all installations should use secondary retention / netting (appropriate to the installation environment) where applicable. It is the exclusive responsibility of the contractor, installer and/or end-user to: (a) determine the suitability of the product for its intended application; and, (b) ensure that the product is safely installed (with secondary retention / netting where appropriate) and in compliance with all applicable laws and regulations. To the extent permissible under applicable laws, Dialight disclaims all liability for personal injury and/or other damage resulting from any dislodgment or other dislocation of its products.

www.dialight.com


SafeSite® LED High Bay - High Efficiency - ATEX / IECEx

Mounting Options & Accessories



HBXW3-SS

- 316 stainless steel swivel bracket (included with fixture)



HBXW3-SSL-304FT

- 304 stainless steel forward throw bracket

HBXW3-SSL-316FT

- 316 stainless steel forward throw bracket



HBXW3-SSL-316M

- 316 Stainless steel bracket

HBXW3-SSL-304M

- 304 Stainless steel bracket



HBXSBDK

- Sand blast kit (dome lens)

HBXSBDL

- Sacrificial dome lens




HBXSBK

- Sand blast kit (flat lens)

HBXSBL


- Sacrificial flat lens

HBXW3 - Swivel Bracket Dimensions

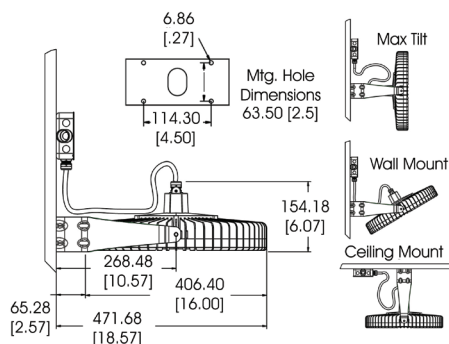

Dimensions in mm (inches)

High Bay with Junction Box Dimensions

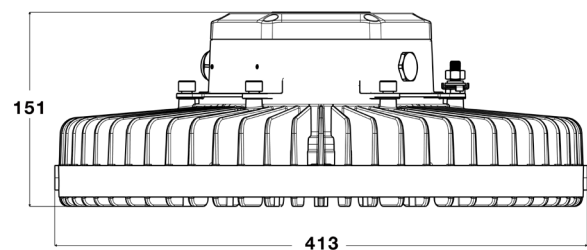


DISCLAIMER. All product information provided is, to the best of Dialight's knowledge, accurate as of the date of publication. When ordering, refer to www.dialight.com for current versions of: (a) relevant product documentation (including the relevant product data sheets); (b) Dialight terms and conditions of sale; and, (c) the relevant product warranty. To the extent that any contract is deemed formed between Dialight and the purchaser of Dialight products and/or an end-user, versions of documents available at www.dialight.com as at the date of sale shall be the versions incorporated therein. In the event of any discrepancy between this document or information provided at www.dialight.com, the latter shall prevail.


SafeSite® LED High Bay - High Efficiency - ATEX / IECEx

Beam Distribution


Medium Pattern

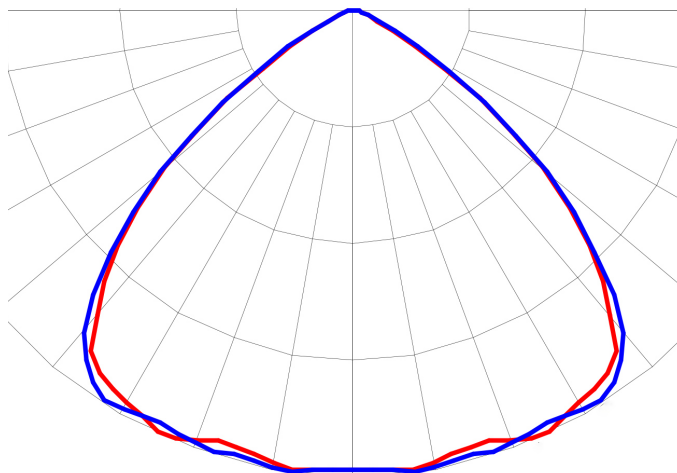

Narrow Pattern

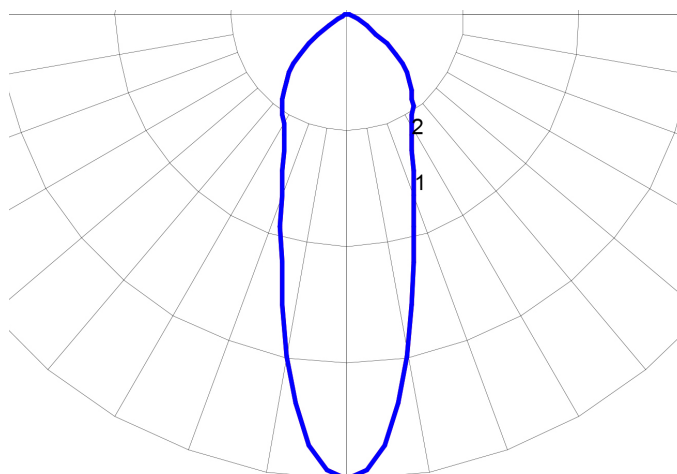

Wide Pattern

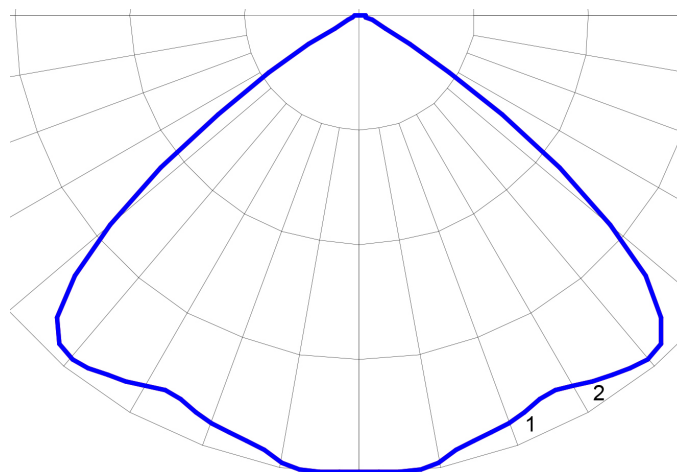

DISCLAIMER. All product information provided is, to the best of Dialight's knowledge, accurate as of the date of publication. When ordering, refer to www.dialight.com for current versions of: (a) relevant product documentation (including the relevant product data sheets); (b) Dialight terms and conditions of sale; and, (c) the relevant product warranty. To the extent that any contract is deemed formed between Dialight and the purchaser of Dialight products and/or an end-user, versions of documents available at www.dialight.com as at the date of sale shall be the versions incorporated therein. In the event of any discrepancy between this document or information provided at www.dialight.com, the latter shall prevail.

SafeSite® LED High Bay - High Efficiency - ATEX / IECEx

Ordering Information - Standard Models

Part Number	Hydrogen Environments	Initial Fixture Lumens	Typical Wattage	Maximum Wattage	Lm/W	IP Rating	Voltage	Colour Temperature (CCT)	Lens	Beam Distribution
Standard Models										
HEA9MC4PN-BCG		23,500	212	235	110	IP66	110 - 277 VAC	5000K (cool white)	Glass	Medium
HEA9RC4PN-BCG		23,500	212	235	110	IP66	110 - 277 VAC	5000K (cool white)	Glass	Wide
HEA9NC4PN-BCG		23,500	212	235	110	IP66	110 - 277 VAC	5000K (cool white)	Glass	Narrow
HEA9MC4KN-BCG		16,000	144	235	110	IP66	100 - 277 VAC	5000K (cool white)	Glass	Medium
HEA9RC4KN-BCG		16,000	144	235	110	IP66	100 - 277 VAC	5000K (cool white)	Glass	Wide
HEA9NC4KN-BCG		16,000	144	235	110	IP66	100 - 277 VAC	5000K (cool white)	Glass	Narrow
HEA9MC4GN-BCG		12,500	112	235	110	IP66	100 - 277 VAC	5000K (cool white)	Glass	Medium
HEA9RC4GN-BCG		12,500	112	235	110	IP66	100 - 277 VAC	5000K (cool white)	Glass	Wide
HEA9NC4GN-BCG		12,500	112	235	110	IP66	100 - 277 VAC	5000K (cool white)	Glass	Narrow
HEA9MC4DN-BCG		9,650	88	235	110	IP66	100 - 277 VAC	5000K (cool white)	Glass	Medium
HEA9RC4DN-BCG		9,650	88	235	110	IP66	100 - 277 VAC	5000K (cool white)	Glass	Wide
HEA9NC4DN-BCG		9,650	88	235	110	IP66	100 - 277 VAC	5000K (cool white)	Glass	Narrow
Junction Box Models ²										
HEA9MC4PN-JCG		23,500	212	235	110	IP66	110 - 277 VAC	5000K (cool white)	Glass	Medium
HEA9RC4PN-JCG		23,500	212	235	110	IP66	110 - 277 VAC	5000K (cool white)	Glass	Wide
HEA9NC4PN-JCG		23,500	212	235	110	IP66	110 - 277 VAC	5000K (cool white)	Glass	Narrow
HEA9MC4KN-JCG		16,000	144	235	110	IP66	100 - 277 VAC	5000K (cool white)	Glass	Medium
HEA9RC4KN-JCG		16,000	144	235	110	IP66	100 - 277 VAC	5000K (cool white)	Glass	Wide
HEA9NC4KN-JCG		16,000	144	235	110	IP66	100 - 277 VAC	5000K (cool white)	Glass	Narrow
HEA9MC4GN-JCG		12,500	112	235	110	IP66	100 - 277 VAC	5000K (cool white)	Glass	Medium
HEA9RC4GN-JCG		12,500	112	235	110	IP66	100 - 277 VAC	5000K (cool white)	Glass	Wide
HEA9NC4GN-JCG		12,500	112	235	110	IP66	100 - 277 VAC	5000K (cool white)	Glass	Narrow
HEA9MC4DN-JCG		9,650	88	235	110	IP66	100 - 277 VAC	5000K (cool white)	Glass	Medium
HEA9RC4DN-JCG		9,650	88	235	110	IP66	100 - 277 VAC	5000K (cool white)	Glass	Wide
HEA9NC4DN-JCG		9,650	88	235	110	IP66	100 - 277 VAC	5000K (cool white)	Glass	Narrow

All values typical unless otherwise stated, Lumen values are typical (tolerance +/- 10%).

¹For optional glass fragment retention film, change the 11th character from a **C** to a **E**. Example: HEA9MC4PN-BCG becomes HEA9MC4PN-BEG

²Junction box models come standard with M20 entries. For M25 entries change the 10th character from **J** to **K**. Example: HEA9MC4PN-JCG becomes HEA9MC4PN-KCG

DISCLAIMER. All product information provided is, to the best of Dialight's knowledge, accurate as of the date of publication. When ordering, refer to www.dialight.com for current versions of: (a) relevant product documentation (including the relevant product data sheets); (b) Dialight terms and conditions of sale; and, (c) the relevant product warranty. To the extent that any contract is deemed formed between Dialight and the purchaser of Dialight products and/or an end-user, versions of documents available at www.dialight.com as at the date of sale shall be the versions incorporated therein. In the event of any discrepancy between this document or information provided at www.dialight.com, the latter shall prevail.

SafeSite® LED High Bay - High Efficiency - ATEX / IECEx

Ordering Information - Hydrogen Environments

Part Number	Hydrogen Environments	Initial Fixture Lumens	Typical Wattage	Maximum Wattage	Lm/W	IP Rating	Voltage	Colour Temperature (CCT)	Lens	Beam Distribution
Hydrogen Environments - Standard Models										
HEH9MC4PN-BCG	•	23,500	212	235	110	IP66	110 - 277 VAC	5000K (cool white)	Glass	Medium
HEH9RC4PN-BCG	•	23,500	212	235	110	IP66	110 - 277 VAC	5000K (cool white)	Glass	Wide
HEH9NC4PN-BCG	•	23,500	212	235	110	IP66	110 - 277 VAC	5000K (cool white)	Glass	Narrow
HEH9MC4KN-BCG	•	16,000	144	235	110	IP66	100 - 277 VAC	5000K (cool white)	Glass	Medium
HEH9RC4KN-BCG	•	16,000	144	235	110	IP66	100 - 277 VAC	5000K (cool white)	Glass	Wide
HEH9NC4KN-BCG	•	16,000	144	235	110	IP66	100 - 277 VAC	5000K (cool white)	Glass	Narrow
HEH9MC4GN-BCG	•	12,500	112	235	110	IP66	100 - 277 VAC	5000K (cool white)	Glass	Medium
HEH9RC4GN-BCG	•	12,500	112	235	110	IP66	100 - 277 VAC	5000K (cool white)	Glass	Wide
HEH9NC4GN-BCG	•	12,500	112	235	110	IP66	100 - 277 VAC	5000K (cool white)	Glass	Narrow
HEH9MC4DN-BCG	•	9,650	88	235	110	IP66	100 - 277 VAC	5000K (cool white)	Glass	Medium
HEH9RC4DN-BCG	•	9,650	88	235	110	IP66	100 - 277 VAC	5000K (cool white)	Glass	Wide
HEH9NC4DN-BCG	•	9,650	88	235	110	IP66	100 - 277 VAC	5000K (cool white)	Glass	Narrow
Hydrogen Environments - Junction Box Models ²										
HEH9MC4PN-JCG	•	23,500	212	235	110	IP66	110 - 277 VAC	5000K (cool white)	Glass	Medium
HEH9RC4PN-JCG	•	23,500	212	235	110	IP66	110 - 277 VAC	5000K (cool white)	Glass	Wide
HEH9NC4PN-JCG	•	23,500	212	235	110	IP66	110 - 277 VAC	5000K (cool white)	Glass	Narrow
HEH9MC4KN-JCG	•	16,000	144	235	110	IP66	100 - 277 VAC	5000K (cool white)	Glass	Medium
HEH9RC4KN-JCG	•	16,000	144	235	110	IP66	100 - 277 VAC	5000K (cool white)	Glass	Wide
HEH9NC4KN-JCG	•	16,000	144	235	110	IP66	100 - 277 VAC	5000K (cool white)	Glass	Narrow
HEH9MC4GN-JCG	•	12,500	112	235	110	IP66	100 - 277 VAC	5000K (cool white)	Glass	Medium
HEH9RC4GN-JCG	•	12,500	112	235	110	IP66	100 - 277 VAC	5000K (cool white)	Glass	Wide
HEH9NC4GN-JCG	•	12,500	112	235	110	IP66	100 - 277 VAC	5000K (cool white)	Glass	Narrow
HEH9MC4DN-JCG	•	9,650	88	235	110	IP66	100 - 277 VAC	5000K (cool white)	Glass	Medium
HEH9RC4DN-JCG	•	9,650	88	235	110	IP66	100 - 277 VAC	5000K (cool white)	Glass	Wide
HEH9NC4DN-JCG	•	9,650	88	235	110	IP66	100 - 277 VAC	5000K (cool white)	Glass	Narrow

All values typical unless otherwise stated, Lumen values are typical (tolerance +/- 10%).

¹For optional glass fragment retention film, change the 11th character from a **Q** to a **E**. Example: HEA9MC4PN-**BCQ** becomes HEA9MC4PN-**BEQ**

²Junction box models come standard with M20 entries. For M25 entries change the 10th character from **J** to **K**. Example: HEA9MC4PN-**JCG** becomes HEA9MC4PN-**KCG**

DISCLAIMER. All product information provided is, to the best of Dialight's knowledge, accurate as of the date of publication. When ordering, refer to www.dialight.com for current versions of: (a) relevant product documentation (including the relevant product data sheets); (b) Dialight terms and conditions of sale; and, (c) the relevant product warranty. To the extent that any contract is deemed formed between Dialight and the purchaser of Dialight products and/or an end-user, versions of documents available at www.dialight.com as at the date of sale shall be the versions incorporated therein. In the event of any discrepancy between this document or information provided at www.dialight.com, the latter shall prevail.

North American HQ

1501 Route 34 South
Farmingdale, NJ 07727
Tel: 732-919-3119
Fax: 732-751-5778
info@dialight.com

EMEA Technical Centre

Ejby Industrivej 91 B
2600 Glostrup
Tel: +45 8877 4545 (Denmark)
Tel: +44 1638 666541 (UK)
Tel: +49 89 12089 5713 (Germany)
Tel: +33 3 23 22 62 58 (France)
sales-europe@dialight.com

Houston

16830 Barker Springs Rd
Ste 407
Houston, TX 77084
Tel: 732-919-3119
Fax: 281-492-1531
info@dialight.com

Middle East

205, Clover Bay Tower,
Al Abraj Street, Business Bay
P.O. Box 123997 Dubai, U.A.E.
Tel: +971 (4) 818 31 56

Australia

108 Howe Street
Osborne Park, WA 6017
Tel: +61 (0) 8 9244 7600
Fax: +61 (0) 8 9244 7601
info@dialight.com.au

Southeast Asia

33 Ubi Avenue 3
#07-72 Vertex (Tower A)
Singapore 408868
Tel: +65 6578 7157
Fax: +65 6578 7150
enquiry@dialight.com.sg

Brazil

Alameda Mercurio,
225 – American Park Empresarial NR
Indaiatuba – SP – 13347– 662
Tel: +55 (19) 3113-4300
Fax: +55 (19) 3113-4300
brasil@dialight.com

WARNING / DISCLAIMERS:

Installation & secondary retention. The use of this product without proper installation (including secondary retention / netting) and periodic inspections, could cause severe injury or death. Dialight recommends that all installations should use secondary retention / netting (appropriate to the installation environment) as applicable. Dialight products are intended for ultimate purchase, installation and operation by knowledgeable persons trained in the functional assessment, installation, use and maintenance of such products and all customers (including but not limited to end customers) are responsible for assessing the suitability of Dialight products for any given installation requirement. It is the exclusive responsibility of the contractor, installer and/or end-user to: (a) determine the suitability of the product for its intended application; and, (b) ensure that the product is safely installed (with secondary retention / netting as appropriate) and in compliance with all applicable laws and regulations.

Product specifications & warranties. All product information provided is, to the best of Dialight's knowledge, accurate as of the date of publication. All values and performance data herein are design or typical values when measured under laboratory conditions. The information herein is subject to change without notice. The products / software detailed herein are subject to applicable warranties and terms and conditions of use/purchase. Unless agreed otherwise in writing by an authorized representative of Dialight, Dialight does not represent that its products are fit for any particular purpose and accepts no liability for the installation and/or unauthorised use of its products. When ordering, refer to www.dialight.com for current versions of: (a) relevant product documentation (including relevant product data sheets); (b) Dialight terms and conditions of sale; and, (c) the relevant product warranties. To the extent that any contract is deemed formed between Dialight and the purchaser of Dialight products and/or an end-user, versions of documents available at www.dialight.com as at the date of sale shall be the versions incorporated therein. In the event of any discrepancy between this document and information provided at www.dialight.com, the latter shall prevail.

Exclusion of liability. To the extent permissible under the relevant law, Dialight disclaims all liability for personal injury and/or other damage resulting from any dislodgment or other dislocation of its products. Whilst Dialight has used its reasonable endeavours to ensure the completeness and accuracy of information herein, Dialight does not assume any liability for damages resulting from use of this information or for any third-party representations made in relation to Dialight products.