


.....Dialight



DuroSite® LED RTO Area Light - UL / CSA
for Indoor and Outdoor Industrial Applications

On when it matters most.

Products and solutions that protect your business





Features & Benefits


- 5 year full performance warranty
- L70 rated for >100,000 hours @ 25°C ambient
- Superior color rendition index compared to HPS, LPS, MV
- Resistant to shock and vibration
- Weather/corrosion resistant lamp assembly and housing
- Temperature compensation technology for longer life
- Factory sealed

Application

Dialight introduces the new state-of-the-art fixture for industrial general lighting. Its rugged solid state design creates a new era where failed lamps and expensive relamping costs become a thing of the past. The DuroSite LED Downlight incorporates cutting edge LED technology and is the most efficient light source available for industrial lighting applications. fixture offers improved

DuroSite LED RTO Area Light - UL / CSA

Standard Models

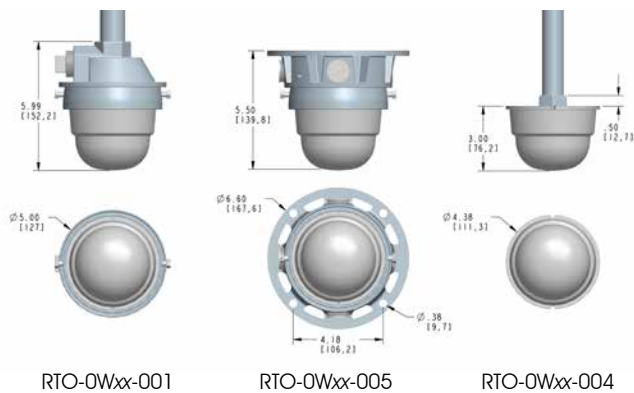

RTO-0Wxx-001

RTO-0Wxx-005

RTO-0Wxx-004

Dimensions in Inches [mm]

Certifications & Ratings

- UL 1598
- CSA 22.2 No. 137-M1981
- IP 66

Mechanical Information:

Fixture weight: RTO0Wxx001: 2.5 lbs (1.13 kg)
RTO0Wxx005: 3.2 lbs (1.45 kg)
RTO0Wxx004: 0.8 lbs (0.36 kg)

Shipping weight: RTO0Wxx001: 3.0 lbs (1.36 kg)
RTO0Wxx005: 4.5 lbs (2.04 kg)
RTO0Wxx004: 1.4 lbs (0.64 Kg)

Mounting:

Pendant Mount: 1" & 3/4" NPT reducer bi-directional
Ceiling Mount: 3/4" NPT 5-way surfac
Pendant Mount: 3/4" NPT threaded conduit

Electrical Specifications:

Operating Voltage: 100 - 277V AC, 50/60 Hz
12 - 48V DC

Total system power consumption: See table

Operating Temp: -40°F to +133°F (-40°C to +55°C)

Harmonics: IEC 61000-3-2

Noise requirement /EMC: FCC Title 47, Subpart B, Section 15, class A device. RF Immunity; 10V/m, 80MHz-1GHz

Transient protection: 1 kV line to line
2 kV line to ground

THD: <20%

Power Factor: > 0.9

Construction:

Housing: Copper free aluminum

Finish: Superior dual coat finish
Sealed polyester topcoat
Chemical-resistant epoxy prime

Lens: UV stabilized abrasion resistant polycarbonate

Photometric Information:

CRI: 75

CCT: 6000K (cool white)

All values typical unless otherwise stated
Lumen values are typical (tolerance +/- 10%)

DuroSite LED RTO Area Light - UL / CSA

Ordering Information

Part Number	Type	Fixture Lumen	Watt	LPW	Warranty	Voltage	CCT	Lens	Optical Pattern
Standard models - 100 - 277V AC									
RTO0W17005	Ceiling mount with junction box	800	8	100	5 yr	100-277V AC	6000K (cool white)	Clear Polycarbonate	Circular
RTO0W17004	Pendant mount	800	8	100	5 yr	100-277V AC	6000K (cool white)	Clear Polycarbonate	Circular
RTO0W17001	Pendant mount with junction box	800	8	100	5 yr	100-277V AC	6000K (cool white)	Clear Polycarbonate	Circular
RTO0W07005	Ceiling mount with junction box	470	8	59	5 yr	100-277V AC	6000K (cool white)	Clear Polycarbonate	Circular
RTO0W07004	Pendant mount	470	8	59	5 yr	100-277V AC	6000K (cool white)	Clear Polycarbonate	Circular
RTO0W07001	Pendant mount with junction box	470	8	59	5 yr	100-277V AC	6000K (cool white)	Clear Polycarbonate	Circular
Standard Models - 24 - 48V DC									
RTO0W18005	Ceiling mount with junction box	800	8	100	5yr	24 - 48V DC	6000K (cool white)	Clear Polycarbonate	Circular
RTO0W18004	Pendant mount	800	8	100	5yr	24 - 48V DC	6000K (cool white)	Clear Polycarbonate	Circular
RTO0W18001	Pendant mount with junction box	800	8	100	5yr	24 - 48V DC	6000K (cool white)	Clear Polycarbonate	Circular
RTO0W08005	Ceiling mount with junction box	470	8	59	5yr	24 - 48V DC	6000K (cool white)	Clear Polycarbonate	Circular
RTO0W08004	Pendant mount	470	8	59	5yr	24 - 48V DC	6000K (cool white)	Clear Polycarbonate	Circular
RTO0W08001	Pendant mount with junction box	470	8	59	5yr	24 - 48V DC	6000K (cool white)	Clear Polycarbonate	Circular

All values typical unless otherwise stated, Lumen values are typical (tolerance +/- 10%).

DuroSite LED RTO Area Light - UL / CSA

Mounting Accessories



Pendant Mount

- 3/4" NPT threaded conduit



Pendant Mount with Junction Box

- 1" & 3/4" NPT reducer bi-directional mounting



Ceiling Mount with Junction Box

- 3/4" 5-way surface mounting



RTO1000

- Flush wall mount



RTO1001

- Junction box wall mount

