

## The Dialight® Reliant™ LED High Bay

Now available in the Americas



# THE RUGGED AND EFFICIENT PERFORMANCE YOU TRUST, NOW FOR LIGHT INDUSTRIAL APPLICATIONS.

The Dialight Reliant High Bay represents an entirely new approach to industrial lighting, offering the same performance, durability and longevity you've come to expect from Dialight, but with a new, state-of-the-art design for lighter duty applications. This first-of-its-kind fixture features Dialight's new, next-generation polymeric housing with a smooth surface that sheds dust and moisture and offers Dialight's industry-leading 10 year warranty. This polymeric powerhouse features the same durable material found in bulletproof glass, tactical armor and U.S. Air Force cockpit canopies. The Reliant is designed for use in light industrial applications and lighter-duty areas of heavy industrial facilities, such as warehouses, corrugating plants, packaging facilities, light manufacturing, automotive assembly areas, aviation facilities, chemical storage areas and other large indoor spaces.

### FEATURES & BENEFITS


- 10 year warranty
- Up to 160 lm/W
- UL 1598
- DLC Standard & Premium
- Damp location
- Next gen polymeric housing
- 18,000-72,000 lumens
- Up to 100' mounting height

- Modular configurations
- · Easy to install and maintain
- Direct uplight accessory available
- Field replaceable parts available
- Title 24 compliant
- Controls enabled

2 www.dialight.com





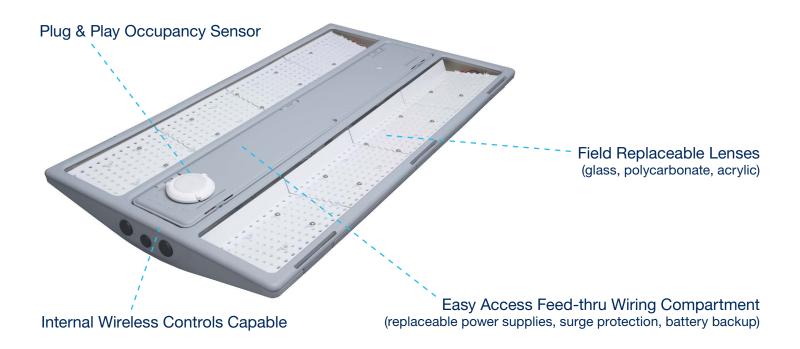

www.dialight.com 3

#### North American HQ

1501 Route 34 South Farmingdale, NJ 07727

Tel: 732-919-3119 Fax: 732-751-5778 info@dialight.com

#### Houston

16830 Barker Springs Rd Ste 407 Houston, TX 77084 Tel: 732-919-3119

Fax: 281-492-1531 info@dialight.com

#### Brazil

Alameda Mercurio, 225 – American Park Empresarial NR Indaiatuba - SP - 13347 - 662

Tel: +55 (19) 3113-4300 Fax: +55 (19) 3113-4300

brasil@dialight.com

#### WARNING / DISCLAIMERS:

WARNING / DISCLAIMERS:
Installation & secondary retention. The use of this product without proper installation (including secondary retention / netting) and periodic inspections, could cause severe injury or death. Dialight recommends that all installations should use secondary retention / netting (appropriate to the installation environment) as applicable. Dialight products are intended for ultimate purchase, installation and operation by knowledgeable persons trained in the functional assessment, installation, use and maintenance of such products and all customers (including but not limited to end customers) are responsible for assessing the suitability of Dialight products for any given installation, use and maintenance of such products and all customers (including but not limited to end customers) are responsibility of the contractor, installer and/or end-user to: (a) determine the suitability of the product for its intended application; and, (b) ensure that the product is safely installed (with secondary retention / netting as appropriate) and in compliance with all applicable laws and regulations. Product specifications & warranties. All product information provided is, to the best of Dialight's knowledge, accurate as of the date of publication. All values and performance data herein are design of typical values when measured under laboratory conditions. The information herein is subject to change without notice. The products / software detailed herein are subject to applicable warranties and terms and conditions of use/purchase. Unless agreed otherwise in writing by an authorized representative of Dialight, Dialight does not represent that its products are fit for any particular purpose and accepts no liability for the installation and/or unauthorised use of its products. When ordering, refer to www.dialight.com for current versions of: (a) relevant product data sheets); (b) Dialight terms and conditions of sale; and. (c) the relevant product warranties. To the extent that any contract is deemed formed b