



Dialight

MADE TO STOCK
Catalog

2020 Q1

Dialight LED Area Light

Stock Part Numbers



Product	Brand	Part Number	Description
Area Light	SafeSite®	ALC7BC26DNWNGN	SafeSite Area Light, 360°, 5400 Lumens, 40 Watts, 100 - 277 VAC, Cool White 5000K, Glass - Clear, Gray, 10' (3 meter) Power Cable, Dimming (0-10V), (UL 844 Class I Div. 1)
Area Light	SafeSite®	ALC7BC27DBWNGN	SafeSite Area Light, 360°, 7000 Lumens, 52 Watts, 100 - 277 VAC, Cool White 5000K, Glass - Clear, Gray, Swivel Bracket, Locking 0-90° - 316 SS, 10' (3 meter) Power Cable, Dimming (0-10V), (UL 844 Class I Div. 1)
Area Light	SafeSite®	ALC7BC27DNWNGN	SafeSite Area Light, 360°, 7000 Lumens, 52 Watts, 100 - 277 VAC, Cool White 5000K, Glass - Clear, Gray, 10' (3 meter) Power Cable, (UL 844 Class I Div. 1)
Area Light	SafeSite®	ALD5AC26DNWNGN	SafeSite Area Light, 180°, 5100 Lumens, 40 Watts, 100 - 277 VAC, Cool White 5000K, Polycarbonate - Diffused, Gray, 10' (3 meter) Power Cable, Dimming (0-10V), (UL 844 Class I Div. 2)
Area Light	SafeSite®	ALD5BB56NNWNGN	SafeSite Area Light, No Options, 360°, 5700 Lumens, 58 Watts, 347 - 480 VAC, Cool White 5000K, Polycarbonate - Diffused, Gray, 10' (3 meter) Power Cable, (UL 844 Class I Div. 2)
Area Light	SafeSite®	ALD5BC24DNWNGN	SafeSite Area Light, 360°, 3900 Lumens, 30 Watts, 100 - 277 VAC, Cool White 5000K, Polycarbonate - Diffused, Gray, 10' (3 meter) Power Cable, Dimming (0-10V), (UL 844 Class I Div. 2)
Area Light	SafeSite®	ALD5BC26DNWNGN	SafeSite Area Light, 360°, 5300 Lumens, 40 Watts, 100 - 277 VAC, Cool White 5000K, Polycarbonate - Diffused, Gray, 10' (3 meter) Power Cable, Dimming (0-10V), (UL 844 Class I Div. 2)
Area Light	SafeSite®	ALD7BC25DCNNGN	SafeSite Area Light, 360°, 5700 Lumens, 40 Watts, 100 - 277 VAC, Cool White 5000K, Glass - Clear, Gray, Retro-fit Adapter - Crouse-Hinds - Champ, Dimming (0-10V), (UL 844 Class I Div. 2)
Area Light	SafeSite®	ALD7BC25DNWNGN	SafeSite Area Light, 5700 Lumens, 40 Watts, 100 - 277 VAC, Cool White 5000K, Glass - Clear, Gray, 10' (3 meter) Power Cable, Dimming (0-10V), (UL 844 Class I Div. 2)
Area Light	SafeSite®	ALD7BC26DCNNGN	SafeSite Area Light, 360°, 5700 Lumens, 40 Watts, 100 - 277 VAC, Cool White 5000K, Glass - Clear, Gray, Retro-fit Adapter - Crouse-Hinds - Champ, Dimming (0-10V), (UL 844 Class I Div. 2)
Area Light	SafeSite®	ALD7BC26DNWNGN	SafeSite Area Light, 5700 Lumens, 40 Watts, 100 - 277 VAC, Cool White 5000K, Glass - Clear, Gray, 10' (3 meter) Power Cable, Dimming (0-10V), (UL 844 Class I Div. 2)
Area Light	SafeSite®	ALD7BC27DBWNGN	SafeSite Area Light, 360°, 7300 Lumens, 52 Watts, 100 - 277 VAC, Cool White 5000K, Glass - Clear, Gray, Swivel Bracket, Locking 0-90° - 316 SS, 10' (3 meter) Power Cable, Dimming (0-10V), (UL 844 Class I Div. 2)
Area Light	SafeSite®	HZC9C2N	SafeSite Area Light, 360°, 5700 Lumens, 40 Watts, 100 - 277 VAC, Cool White 5000K, Glass - Clear, 10' [3 meter] Power Cable, Gray, [UL 844 Class I Div. 1]
Area Light	SafeSite®	HZCFC2N	SafeSite Area Light, 360°, 7300 Lumens, 52 Watts, 100 - 277 VAC, Cool White 5000K, Glass - Clear, 10' [3 meter] Power Cable, Gray, [UL 844 Class I Div. 1]
Area Light	SafeSite®	HZCFC2NDR	SafeSite Area Light, 360°, 7300 Lumens, 52 Watts, 100 - 277 VAC, Cool White 5000K, Glass - Clear, Swivel Bracket, Locking 0-90 Degrees - 316 SS, 10' [3 meter] Power Cable, Gray, [UL 844 Class I Div. 1]
Area Light	SafeSite®	HZD3C2N	SafeSite Area Light, 360°, 4200 Lumens, 30 Watts, 100 - 277 VAC, Cool White 5000K, Polycarbonate - Diffused, 10' [3 meter] Power Cable, Gray, [UL 844 Class I Div. 2]
Area Light	SafeSite®	HZD5C2G	SafeSite Area Light, 360°, 5700 Lumens, 40 Watts, 100 - 277 VAC, Cool White 5000K, Glass - Clear, 10' [3 meter] Power Cable, Gray, [UL 844 Class I Div. 2]
Area Light	SafeSite®	HZD5C2GC	SafeSite Area Light, 360°, 5700 Lumens, 40 Watts, 100 - 277 VAC, Cool White 5000K, Glass - Clear, Retro-fit Adapter - Crouse-Hinds - Champ, Gray, [UL 844 Class I Div. 2]
Area Light	SafeSite®	HZD9C2G	SafeSite Area Light, 360°, 5700 Lumens, 40 Watts, 100 - 277 VAC, Cool White 5000K, Glass - Clear, 10' [3 meter] Power Cable, Gray, [UL 844 Class I Div. 2]
Area Light	SafeSite®	HZD9C2GC	SafeSite Area Light, 360°, 5700 Lumens, 40 Watts, 100 - 277 VAC, Cool White 5000K, Glass - Clear, Retro-fit Adapter - Crouse-Hinds - Champ, Gray, [UL 844 Class I Div. 2]

DISCLAIMER. All product information provided is, to the best of Dialight's knowledge, accurate as of the date of publication. When ordering, refer to www.dialight.com for current versions of: (a) relevant product documentation (including the relevant product data sheets); (b) Dialight terms and conditions of sale; and, (c) the relevant product warranty. To the extent that any contract is deemed formed between Dialight and the purchaser of Dialight products and/or an end-user, versions of documents available at www.dialight.com as at the date of sale shall be the versions incorporated therein. In the event of any discrepancy between this document or information provided at www.dialight.com, the latter shall prevail.

Dialight LED Area Light

Stock Part Numbers Continued



Product	Brand	Part Number	Description
Area Light	SafeSite®	HZD9C2N	SafeSite Area Light, 360°, 5300 Lumens, 40 Watts, 100 - 277 VAC, Cool White 5000K, Polycarbonate - Diffused, 10' [3 meter] Power Cable, Gray, [UL 844 Class I Div. 2]
Area Light	SafeSite®	HZD9C9N	SafeSite Area Light, 360°, 6000 Lumens, 58 Watts, 347 - 480 VAC, Cool White 5000K, Polycarbonate - Diffused, 10' [3 meter] Power Cable, Gray, [UL 844 Class I Div. 2]
Area Light	SafeSite®	HZDFC2GDR	SafeSite Area Light, 360°, 7300 Lumens, 52 Watts, 100 - 277 VAC, Cool White 5000K, Glass - Clear, Swivel Bracket, Locking 0-90 Degrees - 316 SS, 10' [3 meter] Power Cable, Gray, [UL 844 Class I Div. 2]
Area Light	Vigilant®	ALU5BC26DCNNGN	Vigilant Area Light, 360°, 5300 Lumens, 40 Watts, 100 - 277 VAC, Cool White 5000K, Polycarbonate - Diffused, Gray, Retro-fit Adapter - Crouse-Hinds - Champ, Dimming (0-10V), (UL 1598/A)
Area Light	Vigilant®	ALU5BC26DNWNGN	Vigilant Area Light, 360°, 5300 Lumens, 40 Watts, 100 - 277 VAC, Cool White 5000K, Polycarbonate - Diffused, Gray, 10' (3 meter) Power Cable, Dimming (0-10V), (UL 1598/A)
Area Light	Vigilant®	ALU5BC27DNWNGN	Vigilant Area Light, 360°, 6700 Lumens, 52 Watts, 100 - 277 VAC, Cool White 5000K, Polycarbonate - Diffused, Gray, 10' (3 meter) Power Cable, Dimming (0-10V), (UL 1598/A)
Area Light	Vigilant®	ALU5BC29DNWNGN	Vigilant Area Light, 360°, 8300 Lumens, 66 Watts, 100 - 277 VAC, Cool White 5000K, Polycarbonate - Diffused, Gray, 10' (3 meter) Power Cable, Dimming (0-10V), (UL 1598/A)
Area Light	Vigilant®	STW9C2N	Vigilant Area Light, 360°, 5300 Lumens, 40 Watts, 100 - 277 VAC, Cool White 5000K, Polycarbonate - Diffused, 10' [3 meter] Power Cable, Gray, [UL 1598/A]
Area Light	Vigilant®	STW9C2NC	Vigilant Area Light, 360°, 5700 Lumens, 40 Watts, 100 - 277 VAC, Cool White 5000K, Polycarbonate - Diffused, Retro-fit Adapter - Crouse-Hinds - Champ, Gray, [UL 1598/A]
Area Light	Vigilant®	STWFC2N	Vigilant Area Light, 360°, 7300 Lumens, 52 Watts, 100 - 277 VAC, Cool White 5000K, Polycarbonate - Diffused, 10' [3 meter] Power Cable, Gray, [UL 1598/A]

Dialight LED Area Light

Accessories

Stock Part Numbers



Product	Brand	Part Number	Description
Area Light	Accessory	HZXCBL2	Accessory - Safety Cable Kit
Area Light	Accessory	HZXJB075	Accessory- 0.75" Ceiling / Wall / Pole Mount Junction Box
Area Light	Accessory	HZXJB075PC1	Accessory- 0.75" Ceiling / Wall / Pole Mount Junction Box - with 120VAC Photocell
Area Light	Accessory	HZXJB150	Accessory- 1.50" Pole Mount Junction Box
Area Light	Accessory	HZXS45	Area Light Stanchion Mount 45° Bracket
Area Light	Accessory	HZXSAFECBLS	Accessory - Safety cables
Area Light	Accessory	HZXSAFEKIT	Accessory- Safety cable kit

DISCLAIMER. All product information provided is, to the best of Dialight's knowledge, accurate as of the date of publication. When ordering, refer to www.dialight.com for current versions of: (a) relevant product documentation (including the relevant product data sheets); (b) Dialight terms and conditions of sale; and, (c) the relevant product warranty. To the extent that any contract is deemed formed between Dialight and the purchaser of Dialight products and/or an end-user, versions of documents available at www.dialight.com as at the date of sale shall be the versions incorporated therein. In the event of any discrepancy between this document or information provided at www.dialight.com, the latter shall prevail.

Dialight LED Area Light Accessories

Stock Part Numbers Continued



Product	Brand	Part Number	Description
Area Light	Accessory	HZXSAFETABS	Accessory- Safety Tabs
Area Light	Accessory	HZXSTAN100S	Accessory- 1.00" (1.315" Pole OD) Slip-Fit Stanchion Mount Junction Box with Junction box mounting hardware (for Area Light products, requires bracket HZXW3 or HZXW7 not included. Brackets not required for Flood Light products)
Area Light	Accessory	HZXSTAN125S	Accessory- 1.25" (1.660" Pole OD) Slip-Fit Stanchion Mount Junction Box with Junction box mounting hardware (for Area Light products, requires bracket HZXW3 or HZXW7 not included. Brackets not required for Flood Light products)
Area Light	Accessory	HZXSTAN125T	Accessory- 1.25" (1.660" Pole OD) NPT Threaded Stanchion Mount Junction Box with Junction box mounting hardware (for Area Light products, requires bracket HZXW3 or HZXW7 not included. Brackets not required for Flood Light products)
Area Light	Accessory	HZXSTAN150S	Accessory- 1.50" (1.900" Pole OD) Slip-Fit Stanchion Mount Junction Box with Junction box mounting hardware (for Area Light products, requires bracket HZXW3 or HZXW7 not included. Brackets not required for Flood Light products)
Area Light	Accessory	HZXSTAN150T	Accessory- 1.50" (1.900" Pole OD) NPT Threaded Stanchion Mount Junction Box with Junction box mounting hardware (for Area Light products, requires bracket HZXW3 or HZXW7 not included. Brackets not required for Flood Light products)
Area Light	Accessory	HZXSTAN200S	Accessory- 2.00" (2.375" Pole OD) Slip-Fit Stanchion Mount Junction Box with Junction box mounting hardware (for Area Light products, requires bracket HZXW3 or HZXW7 not included. Brackets not required for Flood Light products)
Area Light	Accessory	HZXSTAN200T	Accessory- 2.00" (2.375" Pole OD) NPT Threaded Stanchion Mount Junction Box with Junction box mounting hardware (for Area Light products, requires bracket HZXW3 or HZXW7 not included. Brackets not required for Flood Light products)
Area Light	Accessory	HZXTHAP	Appleton MercMaster III - Retrofit Adapter with retrofit wiring box
Area Light	Accessory	HZXTHCH	Crouse Hinds Champ - Retrofit Adapter with retrofit wiring box
Area Light	Accessory	HZXTHGE	GE Filtr-Gard - Retrofit Adapter with retrofit wiring box
Area Light	Accessory	HZXTHKL	Killark Certilite & Certilite V - Retrofit Adapter with retrofit wiring box
Area Light	Accessory	HZXTHM2	Appleton MercMaster II - Retrofit Adapter with retrofit wiring box
Area Light	Accessory	HZXTHP3	Holophane PetroLux II & III - Retrofit Adapter with retrofit wiring box
Area Light	Accessory	HZXHTB	Thomas and Betts Hazlux - Retrofit Adapter with retrofit wiring box
Area Light	Accessory	HZXW01	Accessory - Area Light Wall Mount Bracket
Area Light	Accessory	HZXW3	Accessory- Stainless Steel bracket with mounting hardware
Area Light	Accessory	HZXW4	Accessory- Stainless Steel bracket with Pipe Clamp and mounting hardware
Area Light	Accessory	HZXW45	Accessory - Area Light Wall Mount 45° Bracket
Area Light	Accessory	HZXW7	Accessory- Aluminum bracket with mounting hardware
Area Light	Accessory	HZXW8	Accessory- Aluminum bracket with Pipe Clamp and mounting hardware

DISCLAIMER. All product information provided is, to the best of Dialight's knowledge, accurate as of the date of publication. When ordering, refer to www.dialight.com for current versions of: (a) relevant product documentation (including the relevant product data sheets); (b) Dialight terms and conditions of sale; and, (c) the relevant product warranty. To the extent that any contract is deemed formed between Dialight and the purchaser of Dialight products and/or an end-user, versions of documents available at www.dialight.com as at the date of sale shall be the versions incorporated therein. In the event of any discrepancy between this document or information provided at www.dialight.com, the latter shall prevail.

Dialight LED Floodlight

Stock Part Numbers




Product	Brand	Part Number	Description
Floodlight	SafeSite®	FLD266NC2NG	SafeSite Floodlight 11250 Lumens, 109 Watts, 100-277V AC, Cool White, NEMA 6, Clear Tempered Glass Lens, [CID2]
Floodlight	SafeSite®	FLD266NC2NGDR	SafeSite Floodlight 11205 Lumens, 109 Watts, 100-277V AC, Cool White, NEMA 6, Clear Tempered Glass Lens, Drilling rig accessories kit [CID2]
Floodlight	SafeSite®	FLD276NC2NG	SafeSite Floodlight 11500 Lumens, 109 Watts, 100-277V AC, Cool White, NEMA 7x6, Clear Tempered Glass Lens, [CID2]
Floodlight	SafeSite®	FLD276NC5NG	SafeSite Floodlight 11750 Lumens, 113 Watts, 347-480V AC, Cool White, NEMA 7x6, Clear Tempered Glass Lens, [CID2]
Floodlight	SafeSite®	FLD466NC4NG	SafeSite Floodlight 15000 Lumens, 130 Watts, 100-277V, Cool White, NEMA 6, Clear Tempered Glass Lens, [CID2]
Floodlight	SafeSite®	FLD466NC4NGDR	SafeSite Floodlight 15000 Lumens, 130 Watts, 100-277V, Cool White, NEMA 6, Clear Tempered Glass Lens, Drilling rig accessories kit [CID2]
Floodlight	SafeSite®	FLD76B2BNTNNGN	SafeSite Floodlight 15000 Lumens, 135 Watts, 100-277V, Cool White, NEMA 6, Clear Tempered Glass Lens, [CID2]
Floodlight	SafeSite®	FLD77B2ANTNNGN	SafeSite Floodlight 11500 Lumens, 109 Watts, 100-277V AC, Cool White, NEMA 7x6, Clear Tempered Glass Lens, [CID2]
Floodlight	SafeSite®	FLD77B5ANTNNGN	SafeSite Floodlight 11750 Lumens, 112 Watts, 347-480V, Cool White, NEMA 7x6, Clear Tempered Glass Lens, [CID2]
Floodlight	Vigilant®	FLW666JC2NG	Vigilant Floodlight, 28,000 Lumens, 190 Watts, 120-277 VAC, Cool White, NEMA 6, Tempered Glass Lens
Floodlight	Vigilant®	FSSU76C2EDDNNGN	Vigilant Floodlight, 28,000 Lumens, 190 Watts, 120-277 VAC, Cool White, NEMA 6, Tempered Glass Lens
Floodlight	DuroSite®	FLU76B2ANTNNGN	DuroSite Floodlight 11250 Lumens, 107 Watts, 100-277V AC, Cool White, NEMA 6, Clear Tempered Glass Lens
Floodlight	DuroSite®	FLU76B2BNTNNGN	DuroSite Floodlight 15000 Lumens, 140 Watts, 100-277V, Cool White, NEMA 6, Clear Tempered Glass Lens
Floodlight	DuroSite®	FLU76B5ANTNNGN	DuroSite Floodlight 11250 Lumens, 112 Watts, 347-480V, Cool White, NEMA 6, Clear Tempered Glass Lens
Floodlight	DuroSite®	FLW255NC2NG	DuroSite Floodlight 11000 Lumens, 109 Watts, 100-277V AC, Cool White, NEMA 5, Clear Tempered Glass Lens
Floodlight	DuroSite®	FLW266NC2NG	DuroSite Floodlight 11250 Lumens, 107 Watts, 100-277V AC, Cool White, NEMA 6, Clear Tempered Glass Lens
Floodlight	DuroSite®	FLW266NC5NG	DuroSite Floodlight 11250 Lumens, 113 Watts, 347-480V AC, Cool White, NEMA 6, Clear Tempered Glass Lens
Floodlight	DuroSite®	FLW276NC2NG	DuroSite Floodlight 11500 Lumens, 109 Watts, 100-277V AC, Cool White, NEMA 7x6, Clear Tempered Glass Lens
Floodlight	DuroSite®	FLW466NC4NG	DuroSite Floodlight 15000 Lumens, 140 Watts, 100-277V, Cool White, NEMA 6, Clear Tempered Glass Lens

DISCLAIMER. All product information provided is, to the best of Dialight's knowledge, accurate as of the date of publication. When ordering, refer to www.dialight.com for current versions of: (a) relevant product documentation (including the relevant product data sheets); (b) Dialight terms and conditions of sale; and, (c) the relevant product warranty. To the extent that any contract is deemed formed between Dialight and the purchaser of Dialight products and/or an end-user, versions of documents available at www.dialight.com as at the date of sale shall be the versions incorporated therein. In the event of any discrepancy between this document or information provided at www.dialight.com, the latter shall prevail.

Dialight LED Dual Floodlight

Stock Part Numbers



Product	Brand	Part Number	Description
Dual Floodlight	SafeSite®	FDD76C2MDSNNGN	SafeSite Dual Floodlight, NEMA6, 56,000 Lumens, 385 Watts, 100-277 VAC, Cool White 5000K, Glass - Clear, Gray, Dimming (0-10V), [UL 844 Class I Div. 2]
Dual Floodlight	SafeSite®	FDD76CAMDSNNGN	SafeSite Dual Floodlight, NEMA6, 56,000 Lumens, 457/409 Watts, 347/480 VAC, Cool White 5000K, Glass - Clear, Gray, Dimming (0-10V), [UL 844 Class I Div. 2]
Dual Floodlight	SafeSite®	FLDB66NC2NG	SafeSite Dual Floodlight, 56,000 Lumens, 385 Watts, 120-277 VAC, Cool White, NEMA 6, Clear Tempered Glass Lens
Dual Floodlight	SafeSite®	FLDB66NC5NG	Safesite Dual Vigilant Floodlight, 56,000 Lumens, 457/409 Watts, 347/480 VAC, Cool White, NEMA 6, Clear Tempered Glass Lens
Dual Floodlight	Vigilant®	FDU76C2MDSNNGN	Dual Vigilant Floodlight, 56,000 Lumens, 385 Watts, 120-277 VAC, Cool White, NEMA 6, Clear Tempered Glass Lens
Dual Floodlight	Vigilant®	FDU76CAMDSNNGN	Dual Vigilant Floodlight, 56,000 Lumens, 457/409 Watts, 347/480 VAC, Cool White, NEMA 6, Clear Tempered Glass Lens
Dual Floodlight	Vigilant®	FDU77C2MDSNNGN	Dual Vigilant Floodlight, 54,000 Lumens, 380 Watts, 120-277 VAC, Cool White, NEMA 7x6, Clear Tempered Glass Lens
Dual Floodlight	Vigilant®	FLWB76NC2NG	Dual Vigilant Floodlight, 54,000 Lumens, 380 Watts, 120-277 VAC, Cool White, NEMA 7x6, Clear Tempered Glass Lens
Dual Floodlight	Vigilant®	FLWBM0NC5NG	Dual Vigilant Floodlight, 54,000 Lumens, 457/409 Watts, 347/480 VAC, Cool White, Medium Optics, Clear Tempered Glass Lens

DISCLAIMER. All product information provided is, to the best of Dialight's knowledge, accurate as of the date of publication. When ordering, refer to www.dialight.com for current versions of: (a) relevant product documentation (including the relevant product data sheets); (b) Dialight terms and conditions of sale; and, (c) the relevant product warranty. To the extent that any contract is deemed formed between Dialight and the purchaser of Dialight products and/or an end-user, versions of documents available at www.dialight.com as at the date of sale shall be the versions incorporated therein. In the event of any discrepancy between this document or information provided at www.dialight.com, the latter shall prevail.

Dialight LED Floodlight Accessories

Stock Part Numbers




Product	Brand	Part Number	Description
Floodlight	Accessory	FLD76B2ANTNNGN	FL Hz G N6 CW 120 10k Bt Gy
Floodlight	Accessory	FLX1HBXSS	304 Stainless steel forward throw bracket
Floodlight	Accessory	FLX1RAB20DB	Right Angle Bracket, 2"
Floodlight	Accessory	FLX1RAB20LG	RIGHT ANGLE BRKT, 2", GRAY
Floodlight	Accessory	FLX1TPT20DB	Tenon topper, pole set screws, and mounting hardware
Floodlight	Accessory	FLX1TPT20LG	Tenon topper, pole set screws, and mounting hardware, Gray
Floodlight	Accessory	FLX2LBH20DB	2 Light Bull Horn Bracket
Floodlight	Accessory	FLX2LBH20LG	2 Light Bull Horn Brkt, Gray
Floodlight	Accessory	FLX2RSR20DB	2 Light Round Square Round Bracket
Floodlight	Accessory	FLX3LBH20DB	3 Light Bull Horn Bracket
Floodlight	Accessory	FLX3RPA20DB	Reducer for 3" OD round pole top
Floodlight	Accessory	FLX3RSR20DB	3 Light Round Square Round Bracket
Floodlight	Accessory	FLX4LBH20DB	4 Light Bull Horn Bracket
Floodlight	Accessory	FLX4RBH20DB	4 Light Bull Horn Bracket in Star Configuration
Floodlight	Accessory	FLX4RPA20DB	Reducer for 4" OD round pole top
Floodlight	Accessory	FLX4SPA20DB	Internal tenon adapter for 4" square pole top
Floodlight	Accessory	FLX5SPA20DB	Internal tenon adapter for 5" square pole top
Floodlight	Accessory	FLX6SPA20DB	Internal tenon adapter for 6" square pole top

DISCLAIMER. All product information provided is, to the best of Dialight's knowledge, accurate as of the date of publication. When ordering, refer to www.dialight.com for current versions of: (a) relevant product documentation (including the relevant product data sheets); (b) Dialight terms and conditions of sale; and, (c) the relevant product warranty. To the extent that any contract is deemed formed between Dialight and the purchaser of Dialight products and/or an end-user, versions of documents available at www.dialight.com as at the date of sale shall be the versions incorporated therein. In the event of any discrepancy between this document or information provided at www.dialight.com, the latter shall prevail.

Dialight LED High Bay

Stock Part Numbers




Product	Brand	Part Number	Description
High Bay	SafeSite®	HEC7MC2ANNWNGN	SafeSite High Bay, Medium, 9500 Lumens, 80 Watts, 100 - 277 VAC, Cool White 5000K, Glass - Clear, Gray, 10' [3 meter] Power Cable, [UL 844 Class I Div. 1]
High Bay	SafeSite®	HEC7MC2BNNWNGN	SafeSite High Bay, Medium, 12500 Lumens, 102 Watts, 100 - 277 VAC, Cool White 5000K, Glass - Clear, Gray, 10' [3 meter] Power Cable, [UL 844 Class I Div. 1]
High Bay	SafeSite®	HEC7MC2CNNWNGN	SafeSite High Bay, Medium, 16000 Lumens, 129 Watts, 100 - 277 VAC, Cool White 5000K, Glass - Clear, Gray, 10' [3 meter] Power Cable, [UL 844 Class I Div. 1]
High Bay	SafeSite®	HEC7MC2ENNWNGN	SafeSite High Bay, Medium, 23500 Lumens, 186 Watts, 100 - 277 VAC, Cool White 5000K, Glass - Clear, Gray, 10' [3 meter] Power Cable, [UL 844 Class I Div. 1]
High Bay	SafeSite®	HEC7WC2CNWNGN	SafeSite High Bay, Wide, 16000 Lumens, 129 Watts, 100 - 277 VAC, Cool White 5000K, Glass - Clear, Gray, Safety Retention Tabs with Forward Throw Bracket - 316 SS, 10' [3 meter] Power Cable, [UL 844 Class I Div. 1]
High Bay	SafeSite®	HEC9MC4DNSNG	SafeSite High Bay, Circular, 9650 Lumens, 88 Watts, 100-277V AC, Cool White, Clear Tempered Glass Lens [CID1]
High Bay	SafeSite®	HEC9MC4GNSNG	SafeSite High Bay, Circular, 12500 Lumens, 112 Watts, 100-277V AC, Cool White, Clear Tempered Glass Lens, Safety Bracket [CID1]
High Bay	SafeSite®	HEC9MC4KNSNG	SafeSite High Bay, Circular, 16000 Lumens, 144 Watts, 100-277V AC, Cool White, Clear Tempered Glass Lens, [CID1]
High Bay	SafeSite®	HEC9MC4PNSNG	SafeSite High Bay, Circular, 23500 Lumens, 212 Watts, 110-277V AC, Cool White, Clear Tempered Glass Lens [CID1]
High Bay	SafeSite®	HEC9RC4KNSSGDFS	SafeSite High Bay, Wide, 16000 Lumens, 144 Watts, 100-277V AC, Cool White, Clear Tempered Glass Lens, 316 SS Forward Throw Bracket, Drilling Rig accessories kit [CID1]
High Bay	SafeSite®	HED7MC2ANNWNGN	SafeSite High Bay, Medium, 11250 Lumens, 80 Watts, 100 - 277 VAC, Cool White 5000K, Glass - Clear, Gray, 10' [3 meter] Power Cable, [UL 844 Class I Div. 2]
High Bay	SafeSite®	HED7MC2BNNWNGN	SafeSite High Bay, Medium, 14250 Lumens, 102 Watts, 100 - 277 VAC, Cool White 5000K, Glass - Clear, Gray, 10' [3 meter] Power Cable, [UL 844 Class I Div. 2]
High Bay	SafeSite®	HED7MC2CNNWNGN	SafeSite High Bay, Medium, 19500 Lumens, 129 Watts, 100 - 277 VAC, Cool White 5000K, Glass - Clear, Gray, 10' [3 meter] Power Cable, [UL 844 Class I Div. 2]
High Bay	SafeSite®	HED7MC2ENNWNGN	SafeSite High Bay, Medium, 26250 Lumens, 186 Watts, 100 - 277 VAC, Cool White 5000K, Glass - Clear, Gray, 10' [3 meter] Power Cable, [UL 844 Class I Div. 2]
High Bay	SafeSite®	HEDGMC4DNSNG	SafeSite High Bay, Circular, 11000 Lumens, 88 Watts, 100 - 277 VAC, Cool White, Clear Tempered Glass Lens, [CID2, CIID2]
High Bay	SafeSite®	HEDGMC4GNSNG	SafeSite High Bay, Circular, 14000 Lumens, 112 Watts, 100 - 277 VAC, Cool White, Clear Tempered Glass Lens, [CID2, CIID2]
High Bay	SafeSite®	HEDGMC4KNSNG	SafeSite High Bay, Circular, 18000 Lumens, 144 Watts, 100 - 277 VAC, Cool White, Clear Tempered Glass Lens, [CID2, CIID2]
High Bay	SafeSite®	HEDGMC4PNSNG	SafeSite High Bay, Circular, 26500 Lumens, 212 Watts, 110 - 277 VAC, Cool White, Clear Tempered Glass Lens, [CID2, CIID2]
High Bay	Vigilant®	HEGMC4DNSNG	Vigilant High Bay, Medium, 11000 Lumens, 88 Watts, 100-277 VAC, Cool White, Clear Tempered Glass Lens, [UL 1598/A]
High Bay	Vigilant®	HEGMC4GNSNG	Vigilant High Bay, Medium, 14000 Lumens, 112 Watts, 100 - 277 VAC, Cool White, Clear Tempered Glass Lens, [UL 1598/A]
High Bay	Vigilant®	HEGMC4KNSNG	Vigilant High Bay, Medium, 18000 Lumens, 144 Watts, 100 - 277 VAC, Cool White, Clear Tempered Glass Lens, [UL 1598/A]

DISCLAIMER. All product information provided is, to the best of Dialight's knowledge, accurate as of the date of publication. When ordering, refer to www.dialight.com for current versions of: (a) relevant product documentation (including the relevant product data sheets); (b) Dialight terms and conditions of sale; and, (c) the relevant product warranty. To the extent that any contract is deemed formed between Dialight and the purchaser of Dialight products and/or an end-user, versions of documents available at www.dialight.com as at the date of sale shall be the versions incorporated therein. In the event of any discrepancy between this document or information provided at www.dialight.com, the latter shall prevail.

Dialight LED High Bay

Stock Part Numbers Continued




Product	Brand	Part Number	Description
High Bay	Vigilant®	HEGMC4PDSNG	Vigilant High Bay, Circular, 26500 Lumens, 212 Watts, 120-277V AC, Cool White, Clear Tempered Glass Lens, 0-10V DC Dimming
High Bay	Vigilant®	HEGMC4PNSNG	Vigilant High Bay, Medium, 26500 Lumens, 212 Watts, 110 - 277 VAC, Cool White, Clear Tempered Glass Lens, [UL 1598/A]
High Bay	Vigilant®	HEGMCPKNSNG	Vigilant High Bay, Circular, 18000 Lumens, 144 Watts, 480V, Cool White, Clear Tempered Glass Lens
High Bay	Vigilant®	HELMC4DNSNG	Vigilant High Bay, Medium, 10500 Lumens, 88 Watts, 100 - 277 VAC, Cool White, Diffused Polycarbonate Dome Lens, [UL 1598/A]
High Bay	Vigilant®	HELMC4GNSNG	Vigilant High Bay, Medium, 12250 Lumens, 112 Watts, 100 - 277 VAC, Cool White, Diffused Polycarbonate Dome Lens, [UL 1598/A]
High Bay	Vigilant®	HELMC4KNSNG	Vigilant High Bay, Medium, 17000 Lumens, 144 Watts, 100 - 277 VAC, Cool White, Diffused Polycarbonate Dome Lens, [UL 1598/A]
High Bay	Vigilant®	HEU7MC2ANNWNGN	Vigilant High Bay, Medium, 11250 Lumens, 80 Watts, 100 - 277 VAC, Cool White 5000K, Glass - Clear, Gray, 10' [3 meter] Power Cable, [UL 1598/A]
High Bay	Vigilant®	HEU7MC2BNWNGN	Vigilant High Bay, Medium, 14250 Lumens, 102 Watts, 100 - 277 VAC, Cool White 5000K, Glass - Clear, Gray, 10' [3 meter] Power Cable, [UL 1598/A]
High Bay	Vigilant®	HEU7MC2CDNWNGN	Vigilant High Bay, Medium, 19500 Lumens, 129 Watts, 100 - 277 VAC, Cool White 5000K, Glass - Clear, Gray, 10' [3 meter] Power Cable, Dimming (0-10V), [UL 1598/A]
High Bay	Vigilant®	HEU7MC2CNNWNGN	Vigilant High Bay, Medium, 19500 Lumens, 129 Watts, 100 - 277 VAC, Cool White 5000K, Glass - Clear, Gray, 10' [3 meter] Power Cable, [UL 1598/A]
High Bay	Vigilant®	HEU7MC2EDNWNGN	Vigilant High Bay, Medium, 26250 Lumens, 186 Watts, 100 - 277 VAC, Cool White 5000K, Glass - Clear, Gray, 10' [3 meter] Power Cable, Dimming (0-10V), [UL 1598/A]
High Bay	Vigilant®	HEU7MC2ENWNGN	Vigilant High Bay, Medium, 26250 Lumens, 186 Watts, 100 - 277 VAC, Cool White 5000K, Glass - Clear, Gray, 10' [3 meter] Power Cable, [UL 1598/A]
High Bay	Vigilant®	HEU7MCPCNNWNGN	Vigilant High Bay, Medium, 18000 Lumens, 129 Watts, 480 VAC Passive Driver (Non Dimmable), Cool White 5000K, Glass - Clear, Gray, 10' [3 meter] Power Cable, [UL 1598/A]
High Bay	Vigilant®	HEU7MCPENWNGN	Vigilant High Bay, Medium, 27000 Lumens, 206 Watts, 480 VAC Passive Driver (Non Dimmable), Cool White 5000K, Glass - Clear, Gray, 10' [3 meter] Power Cable, [UL 1598/A]
High Bay	Vigilant®	HEU7MN2CNNWNGN	Vigilant High Bay, Medium, 18750 Lumens, 129 Watts, 100 - 277 VAC, Neutral White 4000K, Glass - Clear, Gray, 10' [3 meter] Power Cable, [UL 1598/A]
High Bay	Vigilant®	HEULMC2ANNWNGN	Vigilant High Bay, Medium, 10250 Lumens, 80 Watts, 100 - 277 VAC, Cool White 5000K, Polycarbonate Dome - Diffused, Gray, 10' [3 meter] Power Cable, [UL 1598/A]
High Bay	Vigilant®	HEULMC2BNWNGN	Vigilant High Bay, Medium, 13250 Lumens, 102 Watts, 100 - 277 VAC, Cool White 5000K, Polycarbonate Dome - Diffused, Gray, 10' [3 meter] Power Cable, [UL 1598/A]
High Bay	Vigilant®	HEULMC2CNNWNGN	Vigilant High Bay, Medium, 18000 Lumens, 129 Watts, 100 - 277 VAC, Cool White 5000K, Polycarbonate Dome - Diffused, Gray, 10' [3 meter] Power Cable, [UL 1598/A]
High Bay	Vigilant®	HEULMC2ENWNGN	Vigilant High Bay, Medium, 24500 Lumens, 186 Watts, 100 - 277 VAC, Cool White 5000K, Polycarbonate Dome - Diffused, Gray, 10' [3 meter] Power Cable, [UL 1598/A]
High Bay	DuroSite®	HELMC4PNSNG	DuroSite High Bay 23250 Lumens, 212 Watts, 110 - 277 VAC, Cool White, Diffused Polycarbonate Dome Lens, [UL 1598/A]

DISCLAIMER. All product information provided is, to the best of Dialight's knowledge, accurate as of the date of publication. When ordering, refer to www.dialight.com for current versions of: (a) relevant product documentation (including the relevant product data sheets); (b) Dialight terms and conditions of sale; and, (c) the relevant product warranty. To the extent that any contract is deemed formed between Dialight and the purchaser of Dialight products and/or an end-user, versions of documents available at www.dialight.com as at the date of sale shall be the versions incorporated therein. In the event of any discrepancy between this document or information provided at www.dialight.com, the latter shall prevail.

Dialight LED High Bay Accessories

Stock Part Numbers




Product	Brand	Part Number	Description
High Bay	Accessory	HBXC1	High Bay Ceiling Mount
High Bay	Accessory	HBXCAB120K	FORD SAFETY CABLE 120" KC
High Bay	Accessory	HBXCAB48	Accessory - Safety Cables 48"
High Bay	Accessory	HBXCG	High Bay Cable Gland
High Bay	Accessory	HBXCU	High Bay Ceiling Mount
High Bay	Accessory	HBXDC	High Bay Dust Cover
High Bay	Accessory	HBXDC45	High Bay Dust Cover, 45 slope
High Bay	Accessory	HBXDC60	High Bay Dust Cover, 60 slope
High Bay	Accessory	HBXDUALBRCKT	High Bay Dual Bracket
High Bay	Accessory	HBXFSIRREMOTE	OCC Sensor Remote Control
High Bay	Accessory	HBXGS	High Bay Glare Shield
High Bay	Accessory	HBXH	High Bay Hook
High Bay	Accessory	HBXHL	High Bay Hook and Loop
High Bay	Accessory	HBXL	High Bay Loop
High Bay	Accessory	HBXLENAC	High Bay Acrylic Lens, Clear
High Bay	Accessory	HBXLENGC	High Bay Clear Tempered Glass
High Bay	Accessory	HBXLENPC	High Bay Poly Lens Clear
High Bay	Accessory	HBXLENPD	High Bay Poly Lens Diffused
High Bay	Accessory	HBXSB	High Bay Safety Bracket Kit 316 SS (4)
High Bay	Accessory	HBXSBDK	LED Highbay Domed Sand Blast Cover
High Bay	Accessory	HBXSBDL	REPLACEMENT LENS FOR HBXSBDK

DISCLAIMER. All product information provided is, to the best of Dialight's knowledge, accurate as of the date of publication. When ordering, refer to www.dialight.com for current versions of: (a) relevant product documentation (including the relevant product data sheets); (b) Dialight terms and conditions of sale; and, (c) the relevant product warranty. To the extent that any contract is deemed formed between Dialight and the purchaser of Dialight products and/or an end-user, versions of documents available at www.dialight.com as at the date of sale shall be the versions incorporated therein. In the event of any discrepancy between this document or information provided at www.dialight.com, the latter shall prevail.

Dialight LED High Bay Accessories

Stock Part Numbers Continued



Product	Brand	Part Number	Description
High Bay	Accessory	HBXSBK	High Bay Sand Blast shield kit inc 1 lens
High Bay	Accessory	HBXSBL	Replacement lens for sand blast shield kit
High Bay	Accessory	HBXTH347480	High Bay Accessory Top Hat 347/480V
High Bay	Accessory	HBXTH347480B	High Bay Accessory Top Hat 347/480V
High Bay	Accessory	HBXW1	High Bay Wall Mount
High Bay	Accessory	HBXW2	High Bay Swivel Bracket and Cable Gland
High Bay	Accessory	HBXW3	High Bay Swivel Bracket
High Bay	Accessory	HBXW3SSL304FT	Forward Throw Stainless steel swivel bracket, 304
High Bay	Accessory	HBXW3SSL316	Stainless steel swivel bracket, 316
High Bay	Accessory	HBXW3SSL316FT	Forward Throw Stainless steel swivel bracket, 316
High Bay	Accessory	HBXW3SSL316M	Stainless Steel Swivel High Bay Bracket
High Bay	Accessory	HLXW2	High Bay 25K Bracket and Cable Gland
High Bay	Accessory	HLXW3	High Bay 25k Swivel Bracket

DISCLAIMER. All product information provided is, to the best of Dialight's knowledge, accurate as of the date of publication. When ordering, refer to www.dialight.com for current versions of: (a) relevant product documentation (including the relevant product data sheets); (b) Dialight terms and conditions of sale; and, (c) the relevant product warranty. To the extent that any contract is deemed formed between Dialight and the purchaser of Dialight products and/or an end-user, versions of documents available at www.dialight.com as at the date of sale shall be the versions incorporated therein. In the event of any discrepancy between this document or information provided at www.dialight.com, the latter shall prevail.

Dialight LED High Output High Bay

Stock Part Numbers



Product	Brand	Part Number	Description
High Output High Bay	Vigilant®	H6UGMC44NSNNG	Vigilant High Bay, Medium, 60000 Lumens, 480 Watts, 120-277, Cool White, Clear Tempered Glass Lens
High Output High Bay	Vigilant®	H6UGMC4WNSNNG	Vigilant High Bay, Medium, 45000 Lumens, 360 Watts, 120-277, Cool White, Clear Tempered Glass Lens
High Output High Bay	Vigilant®	H6UGMC94NSNNG	Vigilant High Bay, Medium, 60000 Lumens, 520 Watts, 480, Cool White, Clear Tempered Glass Lens
High Output High Bay	Vigilant®	H6UGMC9WNSNNG	Vigilant High Bay, Medium, 45000 Lumens, 380 Watts, 480V, Cool White, Clear Tempered Glass Lens
High Output High Bay	Vigilant®	H6UGNC44NSNNG	Vigilant High Bay, Narrow, 60000 Lumens, 480 Watts, 120-277V AC, Cool White, Clear Tempered Glass Lens
High Output High Bay	Vigilant®	H6UGNC54NSNNG	Vigilant High Bay, Narrow, 60000 Lumens, 520 Watts, 347, Cool White, Clear Tempered Glass Lens
High Output High Bay	Vigilant®	H6UGNC94NSNNG	Vigilant High Bay, Narrow, 57500 Lumens, 520 Watts, 480, Cool White, Clear Tempered Glass Lens
High Output High Bay	Vigilant®	H6UGNN44NSNNG	Vigilant High Bay, Narrow, 60000 Lumens, 480 Watts, 277V AC, Neutral White, Clear Tempered Glass Lens


DISCLAIMER. All product information provided is, to the best of Dialight's knowledge, accurate as of the date of publication. When ordering, refer to www.dialight.com for current versions of: (a) relevant product documentation (including the relevant product data sheets); (b) Dialight terms and conditions of sale; and, (c) the relevant product warranty. To the extent that any contract is deemed formed between Dialight and the purchaser of Dialight products and/or an end-user, versions of documents available at www.dialight.com as at the date of sale shall be the versions incorporated therein. In the event of any discrepancy between this document or information provided at www.dialight.com, the latter shall prevail.

Dialight LED High Output High Bay Accessories

Stock Part Numbers



Product	Brand	Part Number	Description
High Output High Bay	Accessory	H6U7NBDNNNNNGN	480V 60K NCW UL G
High Output High Bay	Accessory	H6XCAB240K	Accessory - 252" Safety Rope (Gen I)
High Output High Bay	Accessory	H6XCAB60	Accessory - 72" Stainless Steel Safety Rope (Gen II 60K)
High Output High Bay	Accessory	H6XCAB72	Accessory - 72" Stainless Steel Safety Rope (Gen II 60K)
High Output High Bay	Accessory	H6XH	Vigilant 60K/45K Wet Location Hook

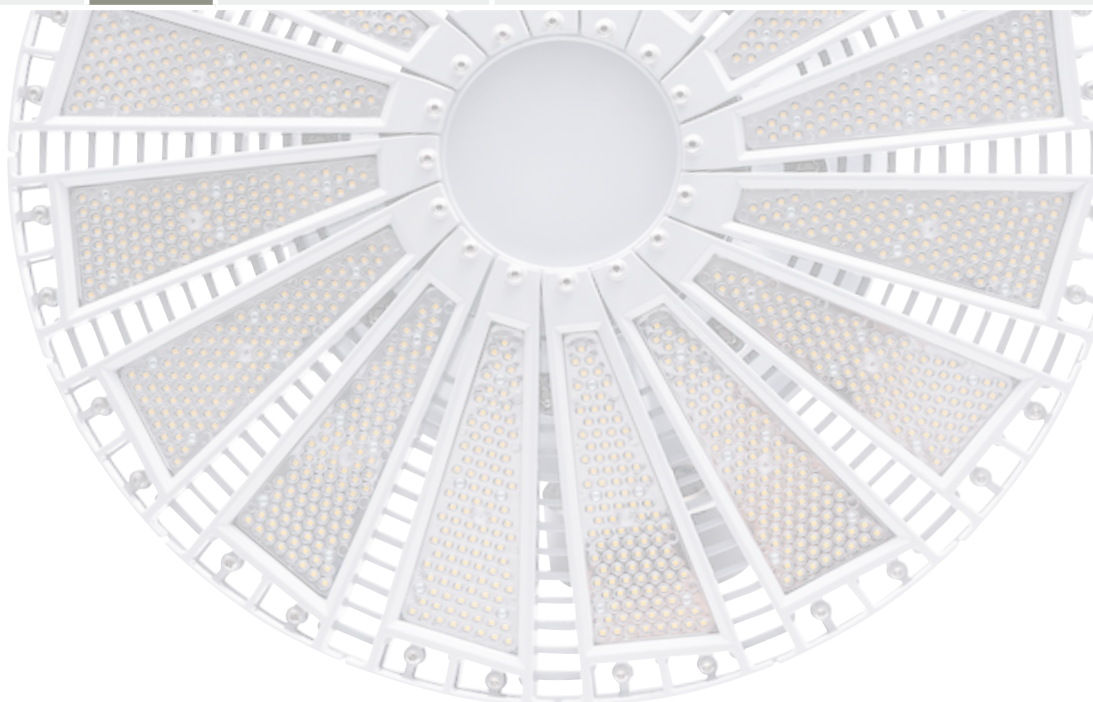

DISCLAIMER. All product information provided is, to the best of Dialight's knowledge, accurate as of the date of publication. When ordering, refer to www.dialight.com for current versions of: (a) relevant product documentation (including the relevant product data sheets); (b) Dialight terms and conditions of sale; and, (c) the relevant product warranty. To the extent that any contract is deemed formed between Dialight and the purchaser of Dialight products and/or an end-user, versions of documents available at www.dialight.com as at the date of sale shall be the versions incorporated therein. In the event of any discrepancy between this document or information provided at www.dialight.com, the latter shall prevail.

Dialight LED Reliant™ High Bay

Stock Part Numbers



Product	Brand	Part Number	Description
Reliant High Bay	Reliant™	RHU7MC2CDCNNGN	Reliant Mid-Range High Bay (Rect), Medium, 18000 Lumens, 123 Watts, 100 - 277 VAC, Cool White 5000K, Glass - Clear, Chain Mount / Conduit Mount, Dimmable (IoT Ready), Gray, [UL 1598/A]
Reliant High Bay	Reliant™	RHU7MC2FDCNNGN	Reliant Mid-Range High Bay (Rect), Medium, 29400 Lumens, 199 Watts, 100 - 277 VAC, Cool White 5000K, Glass - Clear, Chain Mount / Conduit Mount, Dimmable (IoT Ready), Gray, [UL 1598/A]



DISCLAIMER. All product information provided is, to the best of Dialight's knowledge, accurate as of the date of publication. When ordering, refer to www.dialight.com for current versions of: (a) relevant product documentation (including the relevant product data sheets); (b) Dialight terms and conditions of sale; and, (c) the relevant product warranty. To the extent that any contract is deemed formed between Dialight and the purchaser of Dialight products and/or an end-user, versions of documents available at www.dialight.com as at the date of sale shall be the versions incorporated therein. In the event of any discrepancy between this document or information provided at www.dialight.com, the latter shall prevail.

Dialight LED Low Bay

Stock Part Numbers



Product	Brand	Part Number	Description
Low Bay	Vigilant®	LEULUC24NNWNGN	Vigilant Low Bay, Ultra Wide, 4000 Lumens, 42 Watts, 100 - 277 VAC, Cool White 5000K, Polycarbonate Dome - Diffused, Gray, 10' [3 meter] Power Cable, [UL 1598/A]
Low Bay	Vigilant®	LEULUC26NNWNGN	Vigilant Low Bay, Ultra Wide, 6000 Lumens, 56 Watts, 100 - 277 VAC, Cool White 5000K, Polycarbonate Dome - Diffused, Gray, 10' [3 meter] Power Cable, [UL 1598/A]
Low Bay	Vigilant®	LEULUC29DNWNGN	Vigilant Low Bay, Dimming (0-10V), Ultra Wide, 9000 Lumens, 80 Watts, 100 - 277 VAC, Cool White 5000K, Polycarbonate Dome - Diffused, Gray, 10' [3 meter] Power Cable, [UL 1598/A]
Low Bay	Vigilant®	LEULUC29NNWNGN	Vigilant Low Bay, Ultra Wide, 9000 Lumens, 80 Watts, 100 - 277 VAC, Cool White 5000K, Polycarbonate Dome - Diffused, Gray, 10' [3 meter] Power Cable, [UL 1598/A]
Low Bay	Vigilant®	LEULUCA9NNWNGN	Vigilant Low Bay, Ultra Wide, 9000 Lumens, 109/92 Watts, 347/480 VAC Step Down Transformer, Cool White 5000K, Polycarbonate Dome - Diffused, Gray, 10' [3 meter] Power Cable, [UL 1598/A]
Low Bay	DuroSite®	HBWC4L	DuroSite High Bay, Wide, 8500 Lumens, 107 Watts, 100 - 277 VAC, Cool White, Diffused Polycarbonate Dome Lens, [UL 1598/A]
Low Bay	DuroSite®	HBWC5L	DuroSite High Bay, Wide, 8750 Lumens, 140 Watts, 347-480V AC, Cool White, Diffused Polycarbonate Lens
Low Bay	DuroSite®	LBW1C1A	DuroSite Low Bay, Circular, 4250 Lumens, 54 Watts, 100 - 277 VAC, Cool White, Diffused Polycarbonate Dome Lens, [UL 1598/A]
Low Bay	DuroSite®	LBW1C1D	DuroSite Low Bay, Circular, 6000 Lumens, 80 Watts, 100 - 277 VAC, Cool White, Diffused Polycarbonate Dome Lens, [UL 1598/A]

Dialight LED Low Bay

Accessories

Stock Part Numbers




Product	Brand	Part Number	Description
Low Bay	Accessory	LBXLENP	Low Bay Dome Lens

DISCLAIMER. All product information provided is, to the best of Dialight's knowledge, accurate as of the date of publication. When ordering, refer to www.dialight.com for current versions of: (a) relevant product documentation (including the relevant product data sheets); (b) Dialight terms and conditions of sale; and, (c) the relevant product warranty. To the extent that any contract is deemed formed between Dialight and the purchaser of Dialight products and/or an end-user, versions of documents available at www.dialight.com as at the date of sale shall be the versions incorporated therein. In the event of any discrepancy between this document or information provided at www.dialight.com, the latter shall prevail.

Dialight Hazardous Location LED Linears

Stock Part Numbers

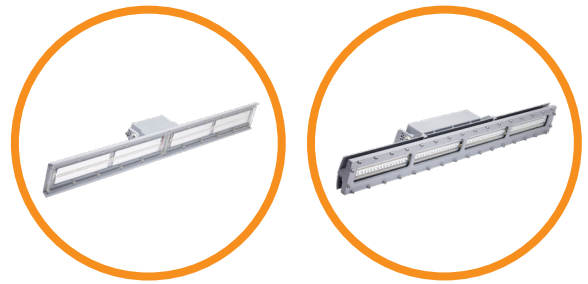


Product	Brand	Part Number	Description
Linear	SafeSite®	LPD3C4B2W	SafeSite Linear - Low Profile, 3300 Lumens, 33 Watts, 100-277V AC, Cool White, Diffused Polycarbonate Lens, [CID2]
Linear	SafeSite®	LSC3C4D3GEX	SafeSite Linear, 3600 Lumens, 39 Watts, 100-277V AC, Cool White, Clear Tempered Glass Lens, 2 Feet [CID1]
Linear	SafeSite®	LSC3C4M3GEX	SafeSite Linear, 7250 Lumens, 78 Watts, 100-277V AC, Cool White, Clear Tempered Glass Lens, 4 feet [CID1]
Linear	SafeSite®	LSC3C4M3GEXDR	SafeSite Linear, 7250 Lumens, 78 Watts, 100-277V AC, Cool White, Clear Tempered Glass Lens, 4 feet with drilling rig accessories [CID1]
Linear	SafeSite®	LSD3C4MEP	SafeSite Linear, 7000 Lumens, 85 Watts, 100-277V AC, Cool White, Clear Polycarbonate Lens, Battery Back-Up, Sustained [CID2]
Linear	SafeSite®	LSD3C5M2P	SafeSite Linear, 7250 Lumens, 78 Watts, 347-480V AC, Cool White, Clear Polycarbonate Lens, 4 feet [CID2, CID2]
Linear	SafeSite®	LPD3C4D2P	SafeSite Linear - Gen II, 3500 Lumens, 33 Watts, 100-277V AC, Cool White, Clear Polycarbonate Lens, Low Profile [CID2]
Linear	SafeSite®	LPD3C4M2P	SafeSite Linear - Gen II, 7000 Lumens, 66 Watts, 100-277 VAC, Cool White, Clear Polycarbonate Lens, Low Profile, [CID2]
Linear	SafeSite®	LPD3C4M2PDR	SafeSite Linear - Gen II, 7000 Lumens, 66 Watts, 100-277V AC, Cool White, Clear Polycarbonate Lens, Low Profile, Drilling rig accessories kit [CID2]
Linear	SafeSite®	LPD3C4M2PDRWOB	SafeSite Linear - Gen II, 7000 Lumens, 66 Watts, 100-277V AC, Cool White, Clear Polycarbonate Lens, Low Profile, Drilling Rig, No Bracket [CID2]
Linear	SafeSite®	LTD3C4D2P	SafeSite Linear - Gen II, 3500 Lumens, 33 Watts, 100-277V AC, Cool White, Polycarbonate Clear Lens, [CID2]
Linear	SafeSite®	LTD3C4M2P	SafeSite Linear - Gen II, 7000 Lumens, 66 Watts, 100-277V AC, Cool White, Polycarbonate Clear Lens, [CID2]
Linear	SafeSite®	LTD3C4M2PDR	SafeSite Linear - Gen II, 7000 Lumens, 66 Watts, 100-277V AC, Cool White, Polycarbonate Clear Lens, Drilling rig accessories kit [CID2]



DISCLAIMER. All product information provided is, to the best of Dialight's knowledge, accurate as of the date of publication. When ordering, refer to www.dialight.com for current versions of: (a) relevant product documentation (including the relevant product data sheets); (b) Dialight terms and conditions of sale; and, (c) the relevant product warranty. To the extent that any contract is deemed formed between Dialight and the purchaser of Dialight products and/or an end-user, versions of documents available at www.dialight.com as at the date of sale shall be the versions incorporated therein. In the event of any discrepancy between this document or information provided at www.dialight.com, the latter shall prevail.

Dialight Non-Hazardous Location LED Linears

Stock Part Numbers




Product	Brand	Part Number	Description
Linear	DuroSite®	LPM3C4H2W	DuroSite Linear - Low Profile, 6700 Lumens, 66 Watts, 100-277V AC, Cool White, Diffused Polycarbonate Lens
Linear	DuroSite®	LPM3C4D2P	DuroSite Linear - Gen II, 3600 Lumens, 33 Watts, 100-277V AC, Cool White, Clear Polycarbonate Lens, Low Profile
Linear	DuroSite®	LPM3C4M2P	DuroSite Linear - Gen II, 7250 Lumens, 66 Watts, 100-277 VAC, Cool White, Clear Polycarbonate Lens, Low Profile
Linear	DuroSite®	LTM3C4D2P	DuroSite Linear - Gen II, 3600 Lumens, 33 Watts, 100-277V AC, Cool White, Clear Polycarbonate Lens,
Linear	DuroSite®	LTM3C4M2P	DuroSite Linear - Gen II, 7250 Lumens, 66 Watts, 100-277V AC, Cool White, Clear Polycarbonate Lens

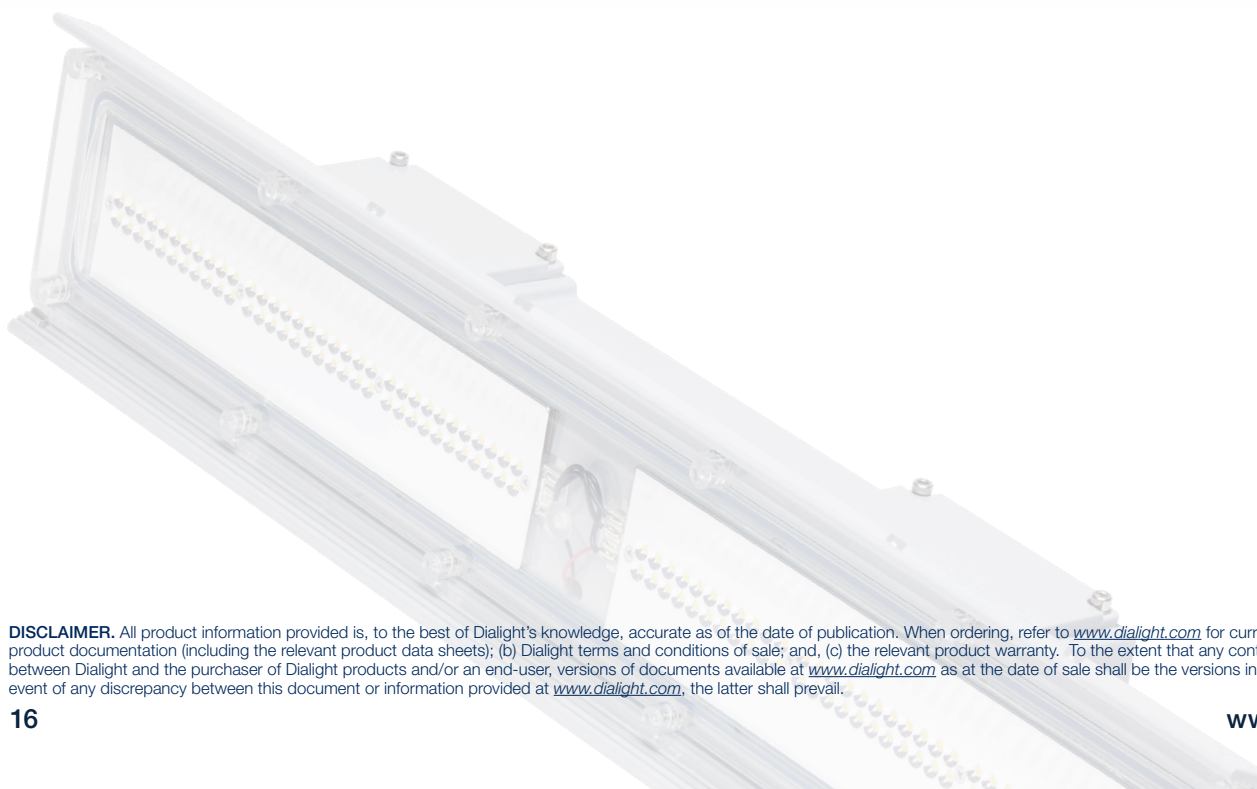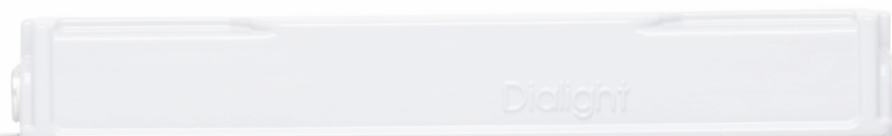

DISCLAIMER. All product information provided is, to the best of Dialight's knowledge, accurate as of the date of publication. When ordering, refer to www.dialight.com for current versions of: (a) relevant product documentation (including the relevant product data sheets); (b) Dialight terms and conditions of sale; and, (c) the relevant product warranty. To the extent that any contract is deemed formed between Dialight and the purchaser of Dialight products and/or an end-user, versions of documents available at www.dialight.com as at the date of sale shall be the versions incorporated therein. In the event of any discrepancy between this document or information provided at www.dialight.com, the latter shall prevail.

Dialight LED Linear Accessories

Stock Part Numbers

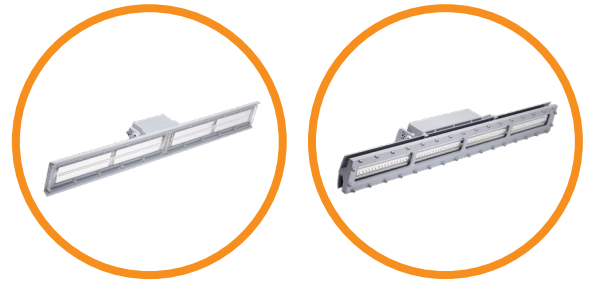

Product	Brand	Part Number	Description
Linear	Accessory	LPXW4	Mounting bracket. Can be angled at 0, 30, 45, 60 and 90 degrees.
Linear	Accessory	LPXW4LP	Low profile mounting bracket. Can be angled at 0 and 15 degrees.
Linear	Accessory	LSXENDCAPKIT	Accessory- Chain mount brackets with 2 mounting brackets and hardware
Linear	Accessory	LSXW4	Accessory- Mounting brackets for 0, 30, 45, 60 or 90 degrees with mounting bracket and mounting hardware, CID2
Linear	Accessory	LSXW5	Accessory- Mounting brackets for 0, 30, 45, 60 or 90 degrees with mounting bracket and mounting hardware, CID
Linear	Accessory	LTX8FTENDCAP	End to end linear mounting kit
Linear	Accessory	LTXENDCAPKIT	Accessory- Chain mount brackets with 2 mounting brackets and hardware
Linear	Accessory	LTXLENPD	Accessory - Clear Poly Replacement lens
Linear	Accessory	LTXSAFEKIT	Accessory - LIN II END CAP SAFETY CABLES
Linear	Accessory	LTXW4	Accessory- Mounting brackets for 0, 30, 45, 60 or 90 degrees with mounting bracket and mounting hardware
Linear	Accessory	LTXW4LP	Accessory - Mounting Bracket, 0 or 15 degrees, Low Profile


DISCLAIMER. All product information provided is, to the best of Dialight's knowledge, accurate as of the date of publication. When ordering, refer to www.dialight.com for current versions of: (a) relevant product documentation (including the relevant product data sheets); (b) Dialight terms and conditions of sale; and, (c) the relevant product warranty. To the extent that any contract is deemed formed between Dialight and the purchaser of Dialight products and/or an end-user, versions of documents available at www.dialight.com as at the date of sale shall be the versions incorporated therein. In the event of any discrepancy between this document or information provided at www.dialight.com, the latter shall prevail.

North American HQ

1501 Route 34 South
Farmingdale, NJ 07727
Tel: 732-919-3119
Fax: 732-751-5778
info@dialight.com

Houston

16830 Barker Springs Rd
Ste 407
Houston, TX 77084
Tel: 732-919-3119
Fax: 281-492-1531
info@dialight.com

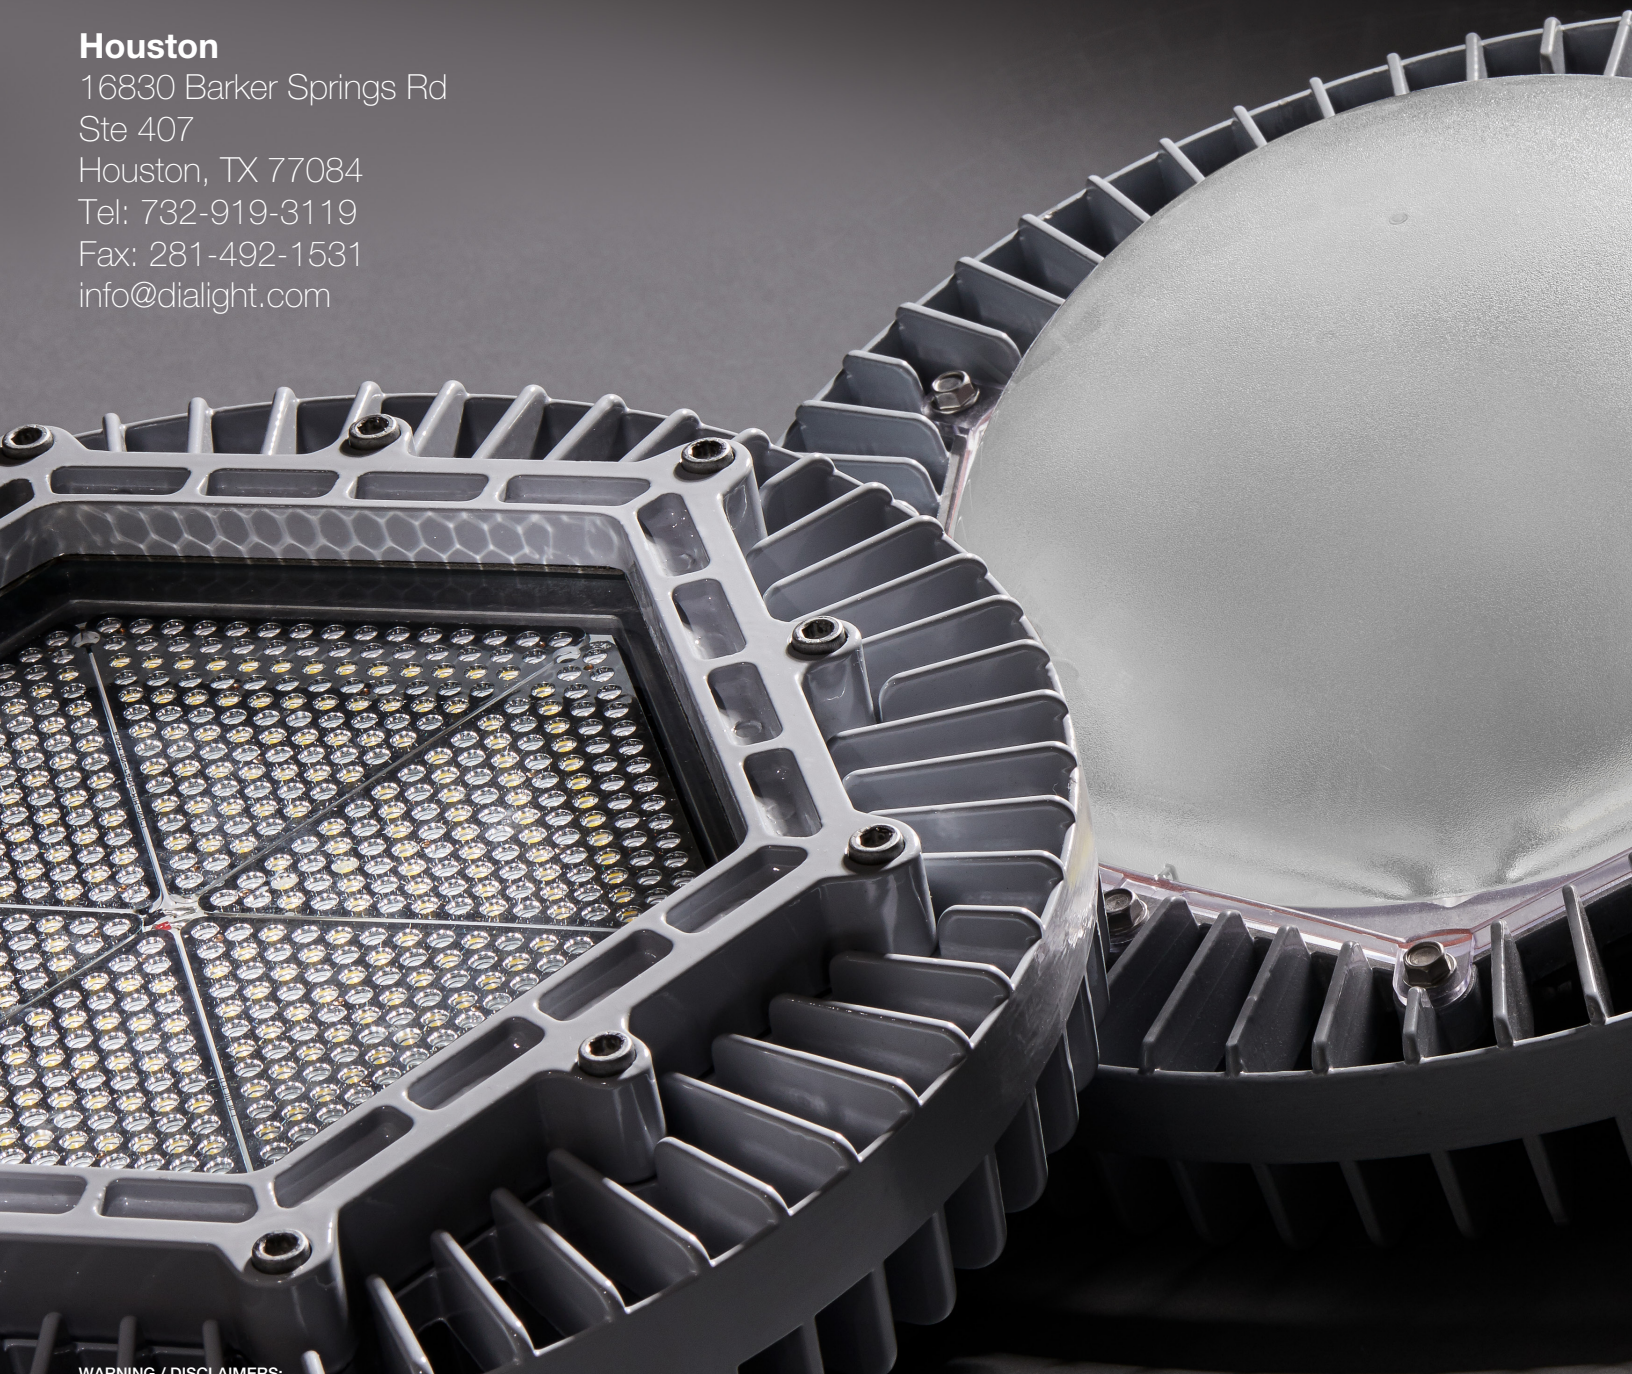

WARNING / DISCLAIMERS:

Installation & secondary retention. The use of these products without proper installation (including secondary retention / netting) and periodic inspections, could cause severe injury or death. Dialight recommends that all installations should use secondary retention / netting (appropriate to the installation environment) as applicable. Dialight products are intended for ultimate purchase, installation and operation by knowledgeable persons trained in the functional assessment, installation, use and maintenance of such products and all customers (including but not limited to end customers) are responsible for assessing the suitability of Dialight products for any given installation requirement. It is the exclusive responsibility of the contractor, installer and/or end-user to: (a) determine the suitability of the product for its intended application; and, (b) ensure that the product is safely installed (with secondary retention / netting as appropriate) and in compliance with all applicable laws and regulations.

Product specifications & warranties. All product information provided is, to the best of Dialight's knowledge, accurate as of the date of publication. All values and performance data herein are design or typical values when measured under laboratory conditions. The information herein is subject to change without notice. The products / software detailed herein are subject to applicable warranties and terms and conditions of use/purchase. Unless agreed otherwise in writing by an authorized representative of Dialight, Dialight does not represent that its products are fit for any particular purpose and accepts no liability for the installation and/or unauthorised use of its products. When ordering, refer to www.dialight.com for current versions of: (a) relevant product documentation (including relevant product data sheets); (b) Dialight terms and conditions of sale; and, (c) the relevant product warranties. To the extent that any contract is deemed formed between Dialight and the purchaser of Dialight products and/or an end-user, versions of documents available at www.dialight.com as at the date of sale shall be the versions incorporated therein. In the event of any discrepancy between this document and information provided at www.dialight.com, the latter shall prevail.

Exclusion of liability. To the extent permissible under the relevant law, Dialight disclaims all liability for personal injury and/or other damage resulting from any dislodgment or other dislocation of its products. Whilst Dialight has used its reasonable endeavours to ensure the completeness and accuracy of information herein, Dialight does not assume any liability for damages resulting from use of this information or for any third-party representations made in relation to Dialight products.