

.....Dialight




StreetSense[®] LED Street Light - ATEX / IECEx for Roadway and Area Illumination



JULY 2020

StreetSense LED Street Light - ATEX / IECEx

Standard Models

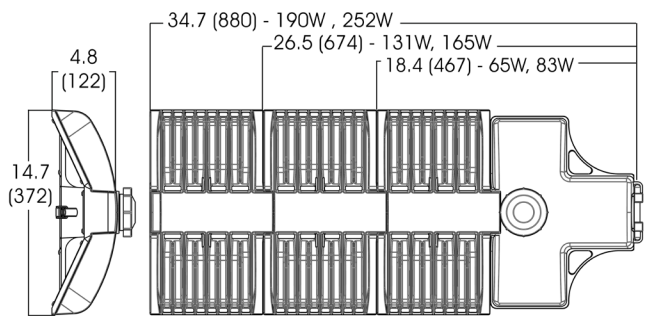

Dimensions in inches (mm)

Certifications & Ratings

- UL1598 (suitable for wet locations)
- ATEX / IECEx Zone 2
- CSA C22.2 No. 250.0-08
- CE
- IP65 (a cable gland with a minimum ingress protection rating of IP54 is required to maintain certification)

Mechanical Information:

Fixture weight:

1 light engine:	16lbs (7.26kg)
2 light engines:	25lbs (11.34kg)
3 light engines:	34lbs (15.42kg)

Shipping weight:

1 light engine:	21lbs (12kg)
2 light engines:	30lbs (16kg)
3 light engines:	39lbs (20kg)

Mounting:

Accommodates 1.25" (1.66" OD) - 2" (2.375" OD) 31.75mm (42.16mm OD) - 50.8mm (60.32mm OD) pipe. Provision for adjustment of +/- 5° at 2.5° increments

EPA (Sq. ft):

1 light engine:	0.60
2 light engines:	0.87
3 light engines:	1.13

Electrical Specifications:

Operating Voltage:

Universal inputs
100 - 277V AC, 50/60 Hz

Total system power consumption:

See table

Operating Temp:

-40°F to 165°F (-40°C to 74°C) ambient

Noise requirement /EMC:

FCC Title 47, Subpart B, Section 15, class A device. RF Immunity; 10V/m, 80MHz-1GHz

Transient protection:

Open circuit surge protection 10kV standard per ANSI/IEEE C62.41. 2.2002 cat C high

THD:

<15% (100 - 240V AC)
<20% (277V AC)

Power Factor:

> 0.9

Construction:

Housing:

Die cast aluminum alloy A360
Polymetric materials UL94 flame retardant materials

Finish:

Polyester powder coat for superior corrosion resistance, Gray - RAL 7040

Lens:

Optically optimized, 6mm tempered glass

Photometric Information:

CRI:

70

CCT:

4300K (neutral white)

Optics:

IES Type III

All values typical unless otherwise stated (tolerance +/- 10%)

WARNING - INSTALLATION & SECONDARY RETENTION. Use of any Dialight products without proper installation (including secondary retention / netting) and periodic inspections could cause severe injury or death. Dialight recommends that all installations should use secondary retention / netting (appropriate to the installation environment) where applicable. It is the exclusive responsibility of the contractor, installer and/or end-user to: (a) determine the suitability of the product for its intended application; and, (b) ensure that the product is safely installed (with secondary retention / netting where appropriate) and in compliance with all applicable laws and regulations. To the extent permissible under applicable laws, Dialight disclaims all liability for personal injury and/or other damage resulting from any dislodgment or other dislocation of its products.

StreetSense LED Street Light - ATEX / IECEx

Ordering Information

Part Number	Number of Light Engines	EPA (SQ. ft)	BUG Rating	Voltage	Lens	CCT	Fixture Lumens	Watt	LPW	Optical Pattern
SLA3N4CG	1	0.60	B1U1G1	100 - 277V AC	Tempered glass	4300K (neutral white)	6,400	62	103	Type III
SLA3N4HG	2	0.87	B2U1G2	100 - 277V AC	Tempered glass	4300K (neutral white)	12,500	125	100	Type III
SLA3N4SG	3	1.13	B3U1G3	100 - 277V AC	Tempered glass	4300K (neutral white)	23,400	228	103	Type III

All values typical unless otherwise stated, Lumen values are typical (tolerance +/- 10%).

WARNING - INSTALLATION & SECONDARY RETENTION. Use of any Dialight products without proper installation (including secondary retention / netting) and periodic inspections could cause severe injury or death. Dialight recommends that all installations should use secondary retention / netting (appropriate to the installation environment) where applicable. It is the exclusive responsibility of the contractor, installer and/or end-user to: (a) determine the suitability of the product for its intended application; and, (b) ensure that the product is safely installed (with secondary retention / netting where appropriate) and in compliance with all applicable laws and regulations. To the extent permissible under applicable laws, Dialight disclaims all liability for personal injury and/or other damage resulting from any dislodgment or other dislocation of its products.

North American HQ

1501 Route 34 South
Farmingdale, NJ 07727
Tel: 732-919-3119
Fax: 732-751-5778
info@dialight.com

EMEA Technical Centre

Ejby Industrivej 91 B
2600 Glostrup
Tel: +45 8877 4545 (Denmark)
Tel: +44 1638 666541 (UK)
Tel: +49 89 12089 5713 (Germany)
Tel: +33 3 23 22 62 58 (France)
sales-europe@dialight.com

Middle East

205, Clover Bay Tower,
Al Abraj Street, Business Bay
P.O. Box 123997 Dubai, U.A.E.
Tel: +971 (4) 818 31 56

Australia

108 Howe Street
Osborne Park, WA 6017
Tel: +61 (0) 8 9244 7600
Fax: +61 (0) 8 9244 7601
info@dialight.com.au

Southeast Asia

33 Ubi Avenue 3
#07-72 Vertex (Tower A)
Singapore 408868
Tel: +65 6578 7157
Fax: +65 6578 7150
enquiry@dialight.com.sg

Brazil

Alameda Mercurio,
225 – American Park Empresarial NR
Indaiatuba – SP – 13347– 662
Tel: +55 (19) 3113-4300
Fax: +55 (19) 3113-4300
brasil@dialight.com

WARNING / DISCLAIMERS:

Installation & secondary retention. The use of this product without proper installation (including secondary retention / netting) and periodic inspections, could cause severe injury or death. Dialight recommends that all installations should use secondary retention / netting (appropriate to the installation environment) as applicable. Dialight products are intended for ultimate purchase, installation and operation by knowledgeable persons trained in the functional assessment, installation, use and maintenance of such products and all customers (including but not limited to end customers) are responsible for assessing the suitability of Dialight products for any given installation requirement. It is the exclusive responsibility of the contractor, installer and/or end-user to: (a) determine the suitability of the product for its intended application; and, (b) ensure that the product is safely installed (with secondary retention / netting as appropriate) and in compliance with all applicable laws and regulations.

Product specifications & warranties. All product information provided is, to the best of Dialight's knowledge, accurate as of the date of publication. All values and performance data herein are design or typical values when measured under laboratory conditions. The information herein is subject to change without notice. The products / software detailed herein are subject to applicable warranties and terms and conditions of use/purchase. Unless agreed otherwise in writing by an authorized representative of Dialight, Dialight does not represent that its products are fit for any particular purpose and accepts no liability for the installation and/or unauthorised use of its products. When ordering, refer to www.dialight.com for current versions of: (a) relevant product documentation (including relevant product data sheets); (b) Dialight terms and conditions of sale; and, (c) the relevant product warranties. To the extent that any contract is deemed formed between Dialight and the purchaser of Dialight products and/or an end-user, versions of documents available at www.dialight.com as at the date of sale shall be the versions incorporated therein. In the event of any discrepancy between this document and information provided at www.dialight.com, the latter shall prevail.

Exclusion of liability. To the extent permissible under the relevant law, Dialight disclaims all liability for personal injury and/or other damage resulting from any dislodgment or other dislocation of its products. Whilst Dialight has used its reasonable endeavours to ensure the completeness and accuracy of information herein, Dialight does not assume any liability for damages resulting from use of this information or for any third-party representations made in relation to Dialight products.