



INDUSTRIAL LED LIGHTING

For Oil & Gas *HOT SHEET*

Dialight

Upstream



1 SafeSite® High Bay
Hazardous location oil, gas and chemical storage and processing

2 SafeSite® and Vigilant® Low Bays
For hazardous and non-hazardous lower ceiling indoor or outdoor applications where wider light distribution is critical

3 ProSite Floodlight F1 Model
For non-hazardous and hazardous indoor or outdoor flood lighting applications; multiple beam patterns available

4 SafeSite® and Vigilant® LP/TC Linears
For hazardous and non-hazardous indoor or outdoor fluorescent strip/vaportite replacements, task or inspection lighting, electrical rooms, shops, and process areas. 4ft and 2ft versions available

5 Vigilant® High Output High Bay - Low Profile
For non-hazardous high ceiling high bay applications typically 40 feet or above

6 SafeSite® and Vigilant® Area Lights
For hazardous and non-hazardous lower ceiling indoor or outdoor process and stanchion mount applications*


7 ProSite Floodlight F2 Model
For non-hazardous indoor or outdoor high power flood applications (Typical 1,000 watt or better HID replacement)

8 Vigilant® High Bay
For non-hazardous indoor or outdoor high bay applications over 14 feet. Remote power supply option available

9 ProSite Streetlight
For plant maintained roadways and general outdoor illumination



Midstream

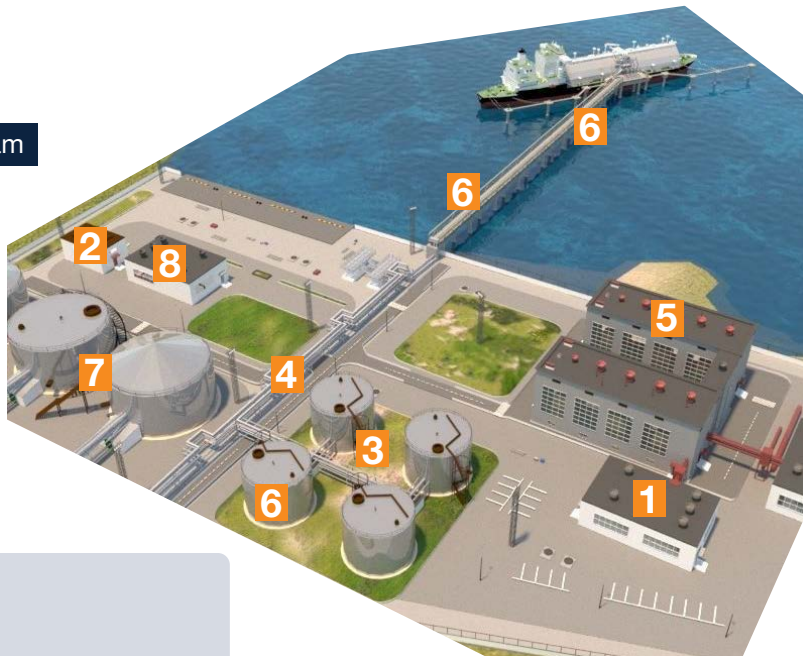

Downstream



*Ask about our retrofit adapters to save labor by retrofitting to existing HID infrastructure

www.dialight.com